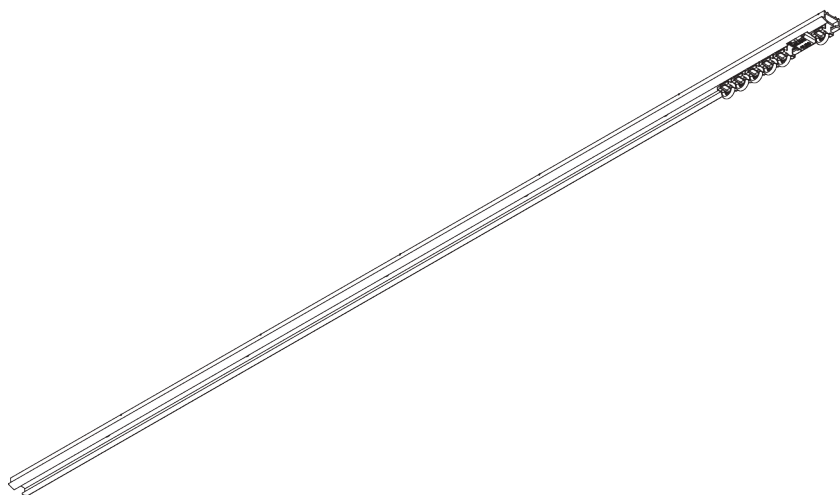



# SG 6011

---



## PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S-M
- **Fitting:** recess (center SG 7550)
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


### **Features:**

- 2-component (2C) glider technology
- Pre-drilled profile
- Bendable
- Fitting tool center SG 7550

# SYSTEM SPECIFICATIONS

## A. PROFILE

Profile and bending information

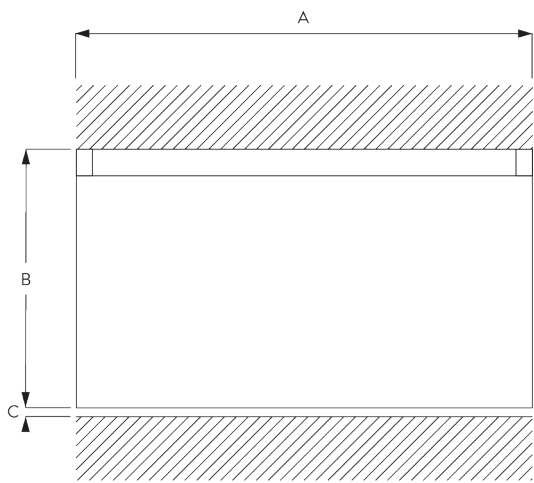


SG 6011p

Profile

Radius:  
10 cm, 20 cm

## B. HOW TO MEASURE




A: System width  
B: System height  
C: Distance between floor and fabric

# FITTING


## A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.

Fixing points



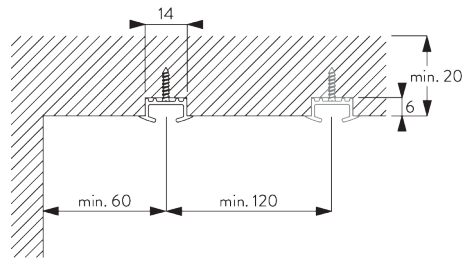
Fitting Tool



A: Center SG 7550  
B: Special screw SG 3019 / 12 mm  
C: Special screw SG 3025 / 18 mm

## B. RECESS FITTING

### Direct into wood



Recess channel: 6 x 14 mm

# GENERAL NOTES

### Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories.
- Stack size depends on curtain make-up and fabric thickness.
- Distance between gliders max. 80 mm / distance between rollers max. 100 mm.
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.

### Fitting







- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.

### Child Safety















- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.


# PARTS

## A. STANDARD PARTS

	<b>SG 3019</b> Special screw 12 mm
	<b>SG 3599</b> Hook
	<b>SG 6011p</b> Profile
	<b>SG 6015</b> Spring
	<b>SG 6065</b> End stop
	<b>SG 11300</b> 2C glider

## B. OPTIONAL PARTS

	<b>SG 2255</b> Brake
	<b>SG 3012</b> Hook
	<b>SG 3025</b> Special screw 18 mm
	<b>SG 3067</b> Connection bridge
	<b>SG 3582</b> Hook
	<b>SG 6057</b> Glider
	<b>SG 6082</b> Glider
	<b>SG 10430</b> Draw rod 50 cm
	<b>SG 10431</b> Draw rod 75 cm
	<b>SG 10432</b> Draw rod 100 cm
	<b>SG 10433</b> Draw rod 125 cm
	<b>SG 10434</b> Draw rod 150 cm
	<b>SG 11295</b> End stop
	<b>SG 11301</b> 2C glider on strip

	<b>SG 11305</b> 2C glider for direct sewing
---	--