
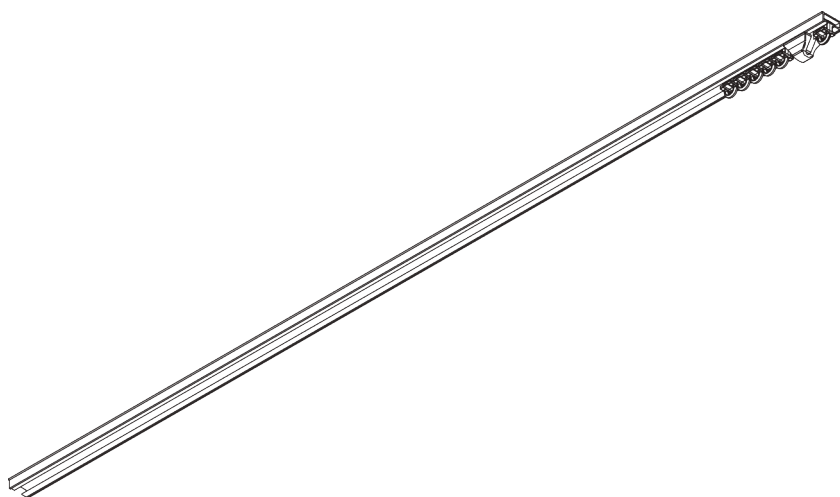


SG 6250



PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S - M
- **Fitting:** recess
- **Colours:** white RAL 9016
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Wave (2C)
- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 11220

Profile with cover

✓ Radius:
10 cm, 20 cm

B. HOW TO MEASURE

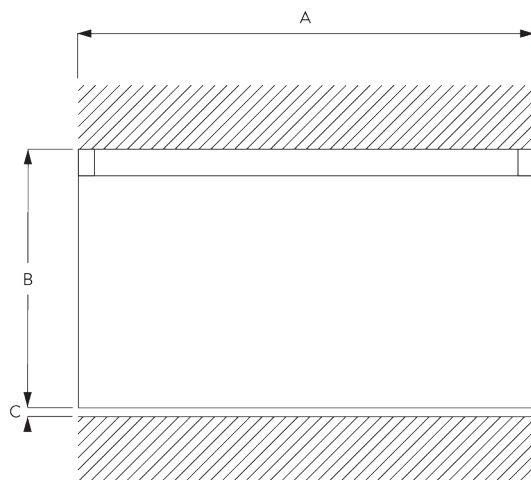

A: System width

B: System height


C: Distance between floor and fabric

FITTING

A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website, login section.


B. RECESS FITTING

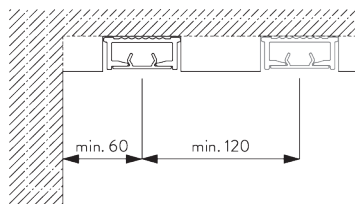


Adhesive assembly exclusively on raw concrete.

SYSTEM OPTIONS


A. WAVE



SG 11295



SG 11302



SG 11303

Standard components:


- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm

Optional components:


- SG 11303 Wave 2C glider cord 60 mm




SG 3582




SG 6349



SG 6363





SG 10075



SG 10076

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

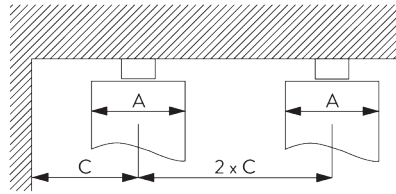

A = Stack depth
B = Stack size
C = Min. distance

2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories.
- Stack size depends on curtain make-up and fabric thickness.
- Distance between gliders max. 80 mm / distance between rollers max. 100 mm.
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.

Fitting




- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.

Child Safety









- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.

PARTS

A. STANDARD PARTS

	SG 3599 Hook
	SG 6065 End stop
	SG 6245 Spring stop
	SG 11220 Profile with cover
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 3012 Hook
	SG 3582 Hook
	SG 6057 Glider
	SG 6082 Glider
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 11222 Connector
	SG 11295 End stop
	SG 11301 2C glider on strip
	SG 11302 Wave 2C glider cord 80 mm
	SG 11303 Wave 2C glider cord 60 mm
	SG 11305 2C glider for direct sewing

