
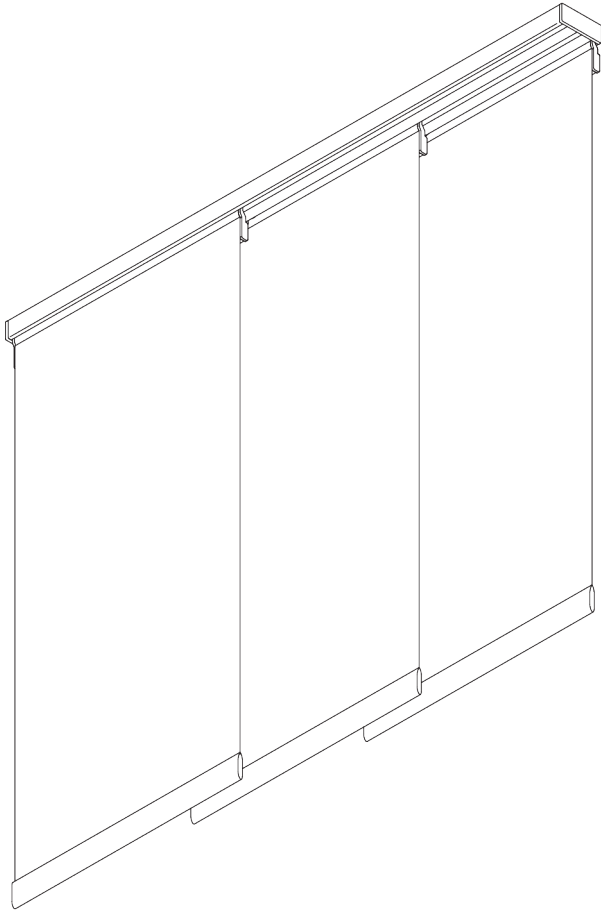


SG 2700



PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S - L
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection

Features:


- 2-component (2C) roller technology
- Silent and smooth running
- Aluminium carriers
- Free floating or connected panels

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS



Panels free floating:
unlimited
Panels connected: 6 m




4 m




Max. 2 kg per m

B. PROFILE


Profile information




SG 10122
Profile 2-channel




SG 10123
Profile 3-channel




SG 10124
Profile 4-channel




SG 10125
Profile 5-channel




SG 10172
Recess profile 2-channel




SG 10173
Recess profile 3-channel




SG 10174
Recess profile 4-channel




SG 10175
Recess profile 5-channel




SG 2004
Bottom bar 20x7 mm




SG 2005
Bottom bar 40x5 mm



SG 2006
Bottom bar 28x3 mm




SG 10230
Carrier alu




SG 10250
Carrier transparent

**C. HOW TO
MEASURE**

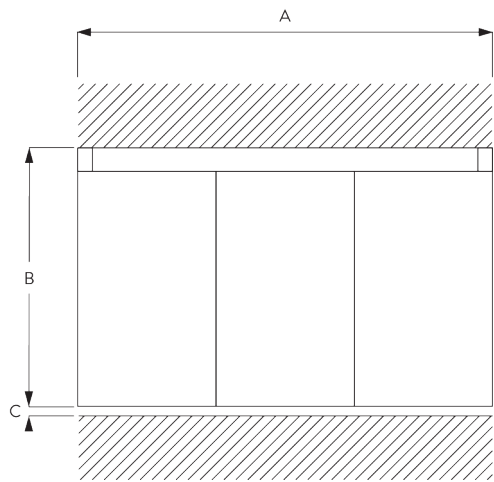

A: System width
 B: System height
 C: Distance between floor and fabric

Dimensions of Panels

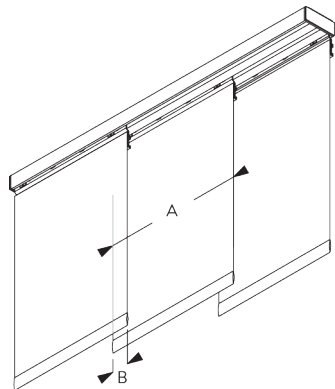

Free floating:
 A: Recommended panel width: 500 - 1200


Connected:
 A: Recommended panel width: 500 - 1200
 B: Overlap: min. 50

FITTING

**A. FITTING
INFORMATION**


Fixing points

For detailed fitting information, visit the Silent Gliss website.




B. CEILING FITTING

Clamp SG 3003 /
 SG 3004

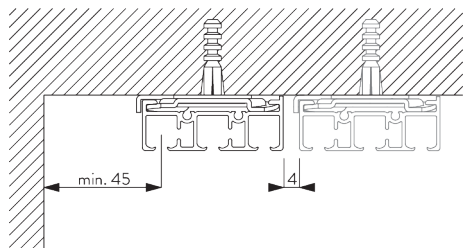

Clamp	SG 10122	SG 10123	SG 10124	SG 10125
SG 3004	X			
SG 3003		X	X	X



SG 3003



Clamp



SG 3004


Clamp

Bracket SG 10136 / SG 10137

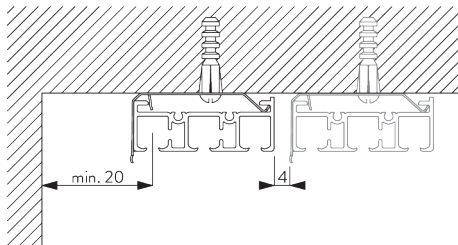

SG 10136

Bracket




SG 10137

Bracket

Bracket	SG 10122	SG 10123	SG 10124
SG 10136	X		
SG 10137		X	X

C. WALL FITTING

Smart Fix

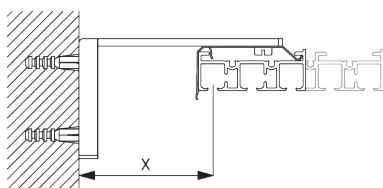


Smart Fix SG 11200 - SG 11204:

Bracket SG 10136 for 2 channel profile.

Bracket SG 10137 for more than 2 channel profiles.

Screw SG 10395 (M4x6) needed.

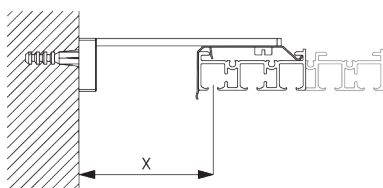


Square Smart Fix SG 11210 - SG 11214:

Bracket SG 10136 for 2 channel profile.


Bracket SG 10137 for more than 2 channel profiles.

Screw SG 10395 (M4x6) needed.


Smart Fix	X mm (SG 10122)	X mm (SG 10123)	X mm (SG 10124)	X mm (SG 10125)
SG 11200 / SG 11210	43	24	24	24
SG 11201 / SG 11211	63	44	44	44
SG 11202 / SG 11212	83	64	64	64
SG 11203 / SG 11213	103	84	84	84
SG 11204 / SG 11214	133	114	114	114
SG 11154	93-121	74-102	74-102	74-102
SG 11155	123-151	104-132	104-132	104-132
SG 11156	172-201	154-182	154-182	154-182

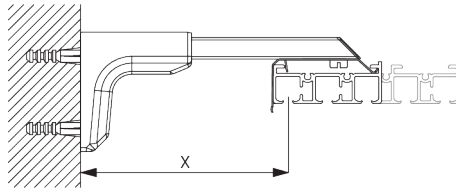

Universal Smart Fix SG 11154 - SG 11156:
 Bracket SG 10136 for 2 channel profile.
 Bracket SG 10137 for more than 2 channel profiles.
 Screw SG 10492 (M4x8) needed.



SG 10136
 Bracket




SG 10137
 Bracket




SG 10395
 Pan head screw M4x6




SG 10492
 Pan head screw M4x8




SG 11200
 Smart Fix 60 mm




SG 11201
 Smart Fix 80 mm




SG 11202
 Smart Fix 100 mm




SG 11203
 Smart Fix 120 mm




SG 11204
 Smart Fix 150 mm




SG 11210
 Square Smart Fix 60 mm




SG 11211
 Square Smart Fix 80 mm




SG 11212
 Square Smart Fix 100 mm




SG 11213
 Square Smart Fix 120 mm




SG 11214
 Square Smart Fix 150 mm



SG 11154
 Universal Smart Fix 120 mm




SG 11155
 Universal Smart Fix 150 mm




SG 11156
 Universal Smart Fix 200 mm

D. RECESS FITTING


Recess profiles
SG 10172 - SG 10175




One wedge SG 10157 per fixing point.
For detailed recess fitting, visit the Silent Gliss website.




SG 10157
Wedge




SG 10172
Recess profile 2-channel



SG 10173
Recess profile 3-channel




SG 10174
Recess profile 4-channel




SG 10175
Recess profile 5-channel

SYSTEM OPTIONS

A. OPERATION

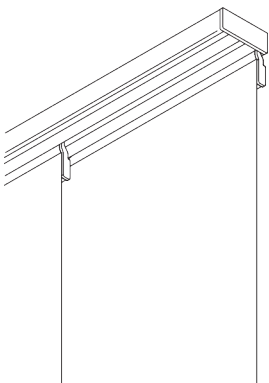

Free floating (unconnected panels)

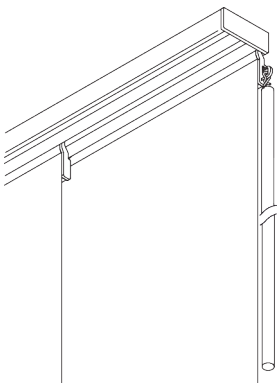

Connected panels (draw rod optional)

B. PANEL STACKING (CONNECTED)



Single stack
Note: dot = fixed panel



Pair stack
Note: dot = fixed panel

Other variations are possible.

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories.
- Stack size depends on panel width.
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.

Fitting




- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!

Child Safety






- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.










PARTS

A. STANDARD PARTS

	SG 2004 Bottom bar 20x7 mm
	SG 2539 Tape
	SG 3003 Clamp
	SG 10123 Profile 3-channel
	SG 10143 Cover
	SG 10159 Countersunk head screw 3.5x13
	SG 10200 2C roller
	SG 10230 Carrier alu
	SG 10252 End cover left
	SG 10253 End cover right


B. OPTIONAL PARTS

	SG 2005 Bottom bar 40x5 mm
	SG 2006 Bottom bar 28x3 mm
	SG 3004 Clamp
	SG 3008 Connection bridge
	SG 6024 Connection bridge
	SG 6149 Safety glider blue
	SG 6245 Spring stop
	SG 10074 Countersunk head screw M4x8
	SG 10122 Profile 2-channel
	SG 10124 Profile 4-channel
	SG 10125 Profile 5-channel
	SG 10136 Bracket
	SG 10137 Bracket
	SG 10140 Angle


	SG 10142 End cover
	SG 10144 End cover
	SG 10145 End cover
	SG 10146 Angle
	SG 10148 Eyelet for draw rod
	SG 10156 End stop
	SG 10157 Wedge
	SG 10158 Click glider
	SG 10172 Recess profile 2-channel
	SG 10173 Recess profile 3-channel
	SG 10174 Recess profile 4-channel
	SG 10175 Recess profile 5-channel
	SG 10250 Carrier transparent
	SG 10340 Eyelet for draw rod

**SG 10395**


Pan head screw M4x6

**SG 10430**


Draw rod 50 cm

**SG 10431**


Draw rod 75 cm

**SG 10432**

Draw rod 100 cm

**SG 10433**


Draw rod 125 cm

**SG 10434**


Draw rod 150 cm

**SG 10492**


Pan head screw M4x8

**SG 11154**


Universal Smart Fix 120 mm

**SG 11155**


Universal Smart Fix 150 mm

**SG 11156**


Universal Smart Fix 200 mm

**SG 11200**


Smart Fix 60 mm

**SG 11201**

Smart Fix 80 mm

**SG 11202**


Smart Fix 100 mm

**SG 11203**


Smart Fix 120 mm

**SG 11204**


Smart Fix 150 mm

**SG 11210**


Square Smart Fix 60 mm

**SG 11211**


Square Smart Fix 80 mm

**SG 11212**

Square Smart Fix 100 mm

**SG 11213**

Square Smart Fix 120 mm

**SG 11214**

Square Smart Fix 150 mm

