


SG 2090

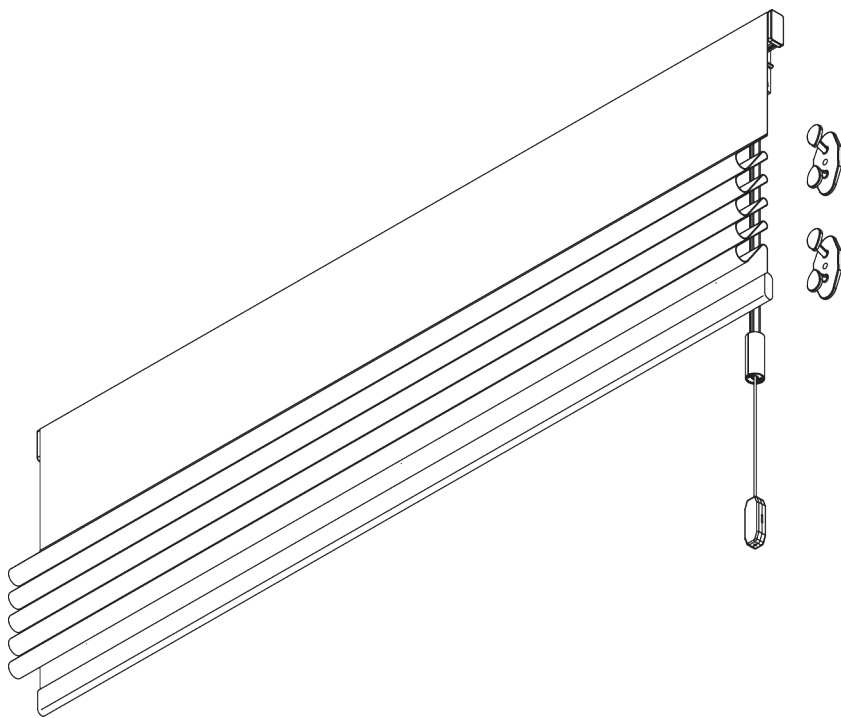

PRODUCT INFORMATION


- **Operation:** cord
- **Range:** S
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016
- **Fabrics:** refer to Silent Gliss fabric collection

Features:


- Easy installation on window sash

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS



1 m



2 m




0.7 kg



2 m²


B. PROFILE

Profile information



SG 2116


Velcro profile



SG 2004

Bottom bar 20x7 mm

C. HOW TO MEASURE

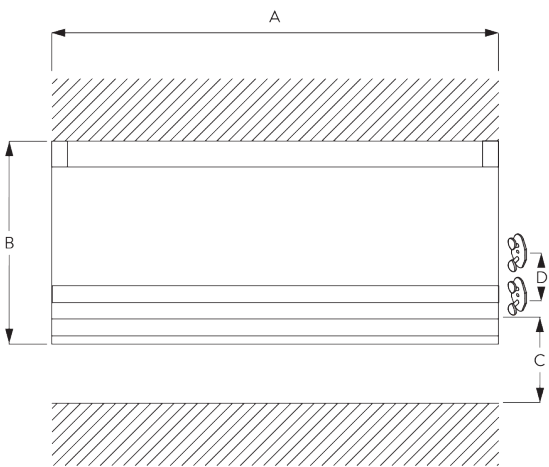


- A: System width
- B: System height
- C: Cleats SG 10742 min. 150 cm above floor
- D: 7 - 35 cm depending on system height

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the [Silent Gliss website](#).

Fixing points



B. CEILING FITTING



Bracket SG 3603



SG 3603
Bracket



C. WALL FITTING

Clip bracket SG 3666




SG 3666
Clip


**Bracket SG 3630,
SG 3655, SG 3660**



SG 3630
Bracket 35 mm



SG 3655
Bracket 50 mm




SG 3660
Bracket 65 mm

<i>Bracket</i>	<i>X mm</i>
SG 3630	38
SG 3655	53
SG 3660	68

SYSTEM OPTIONS

A. FABRIC MAKE-UP

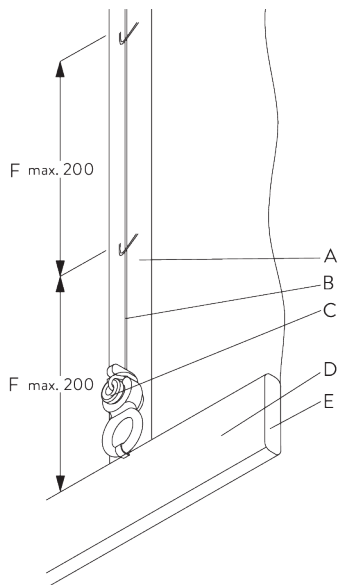

Type A

Loop tape SG 3074:

A: Loop tape SG 3074


B: Cord SG 2216

C: Child safety fastener set SG 3167

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm!

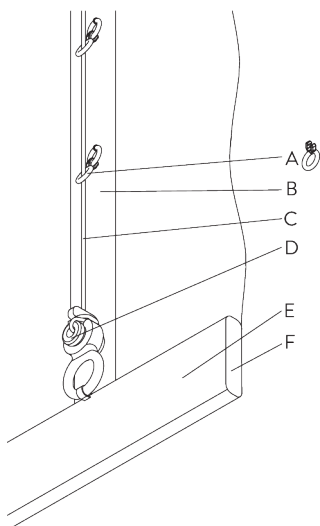

Type B

Ring tape SG 2164:

A: Child Safety Eyelet soft fold SG 3078

B: Ring tape SG 2164

C: Cord SG 2216

D: Child safety fastener set SG 3167

E: Hollow hem

F: Bottom bar SG 2004

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, cross rods, etc.).
- Stack size is typically 15-20% of system height.

Fitting

- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.









- *Qualified fitter must use appropriate screws / fixings for each situation.*
- *Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.*
- *Check space for cables and plugs!*

Child Safety







- *All relevant Silent Gliss systems correspond to child safety EN 13120.*
- *All parties involved must comply with EN 13120.*

PARTS

A. STANDARD PARTS

	SG 2004 Bottom bar 20x7 mm
	SG 2116 Velcro profile
	SG 2131 End cover
	SG 2215 Eyelet
	SG 2216 Cord ø 0.85 mm
	SG 2539 Tape
	SG 2826 Bead chain connector (2 x)
	SG 3074 Loop tape
	SG 3167 Child safety fastener set
	SG 3185 Cord lock
	SG 3637 Cord ø 1.5 mm
	SG 3666 Clip
	SG 10742 Child safety cord cleat
	SG 10745 Child safety break away cord connector

B. OPTIONAL PARTS

	SG 2093 Ring
	SG 2164 Ring tape
	SG 3055 Hook
	SG 3603 Bracket
	SG 3630 Bracket 35 mm
	SG 3655 Bracket 50 mm
	SG 3660 Bracket 65 mm
	SG 11482 Ring

