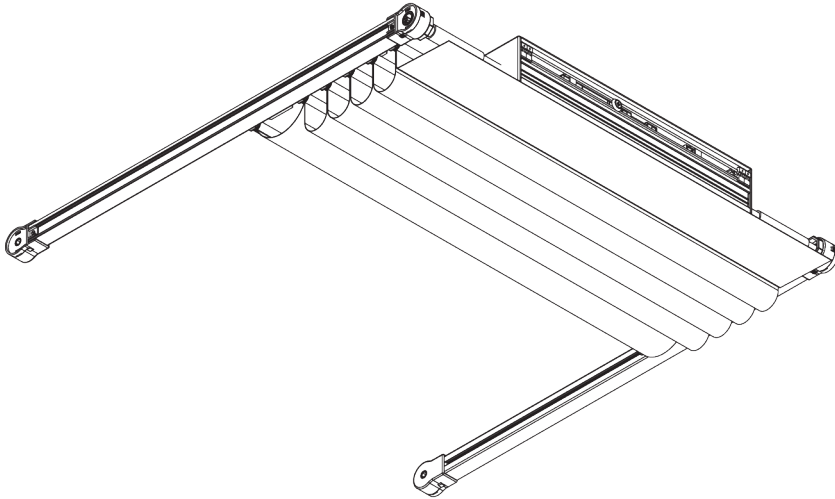



SG 2195



PRODUCT INFORMATION


- **Operation:** motorised
- **Range:** S - L
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection

Features:


- Bendable
- Sloping
- Cantilever
- Special shapes
- Three connected systems
- Various control options

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



Type A: 2.5 m
Type B: 3 m
Type C: 4.6 m




60 cm



6 m



25 kg



Type A: 15 m²
Type B: 18 m²
Type C: 18 m²

Max. system sizes and weights - straight systems

Type B/C (profile SG 2231)

SG 2195		A	B	kg _{max.}	m ² _{max.}
		3 m	6 m	18	18
		4 m	6 m	18	24
		3.6 m	5 m	18	18
		3 m	6 m	25	18
		5 m	6 m	25	30
		6 m	6 m	25	36
		3 m	6 m	25	18
		5 m	6 m	25	30
		6 m	6 m	25	36


Bent systems

Type B/C (profile SG 2231)

SG 2195		A	B	kg _{max.}	m ² _{max.}
		2.5 m	6 m	18	15
		4 m	6 m	18	24
		3.6 m	6 m	18	21.6
		2.5 m	6 m	18	15
		3 m	5 m	18	15
		2.4 m	5 m	18	12
		2.5 m	4 m	10	10
		3 m	4 m	10	12
		2.4 m	3 m	10	7.2


B. PROFILE

Profile and bending information




SG 2191

Profile




SG 2151

Profile



SG 2116

Velcro profile




SG 2144

Profile ø 8 mm



SG 2156

Shaft




SG 2231

Profile




SG 2246

Rod PVC ø 5 mm



SG 2510

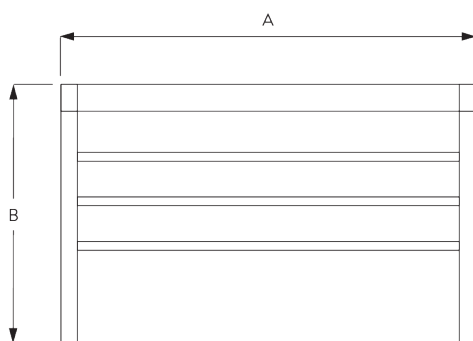
Velcro profile



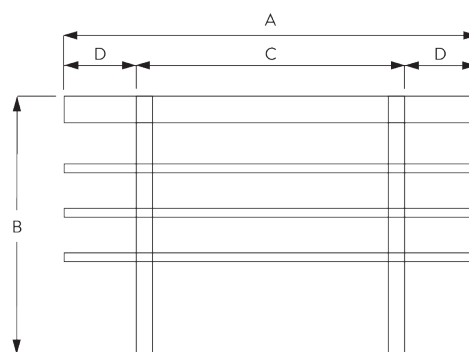
SG 2759

Profile

C. HOW TO MEASURE



A: System width
B: System height



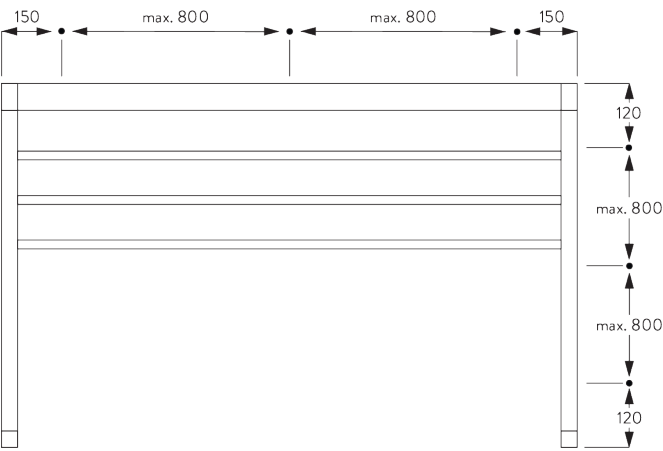
A: System width
B: System height
C: Base system
D: Cantilever max. 80 cm

FITTING

A. FITTING INFORMATION


For detailed fitting information, visit the *Silent Gliss* website.

Fixing points



B. INSIDE FITTING



Clamp SG 3825



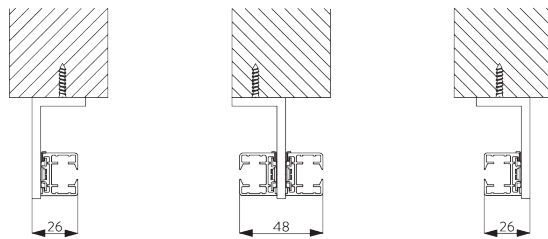
SG 3825
Clamp

C. FACE FITTING


Bracket SG 3181 / SG 3182



SG 3181
Bracket 1 clamp




Double system



SG 3181

Bracket 1 clamp

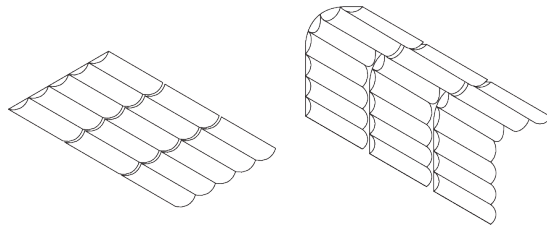


SG 3182

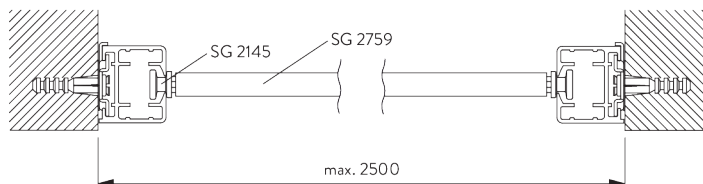
Bracket 2 clamps

SYSTEM OPTIONS

A. THREE CONNECTED SYSTEMS

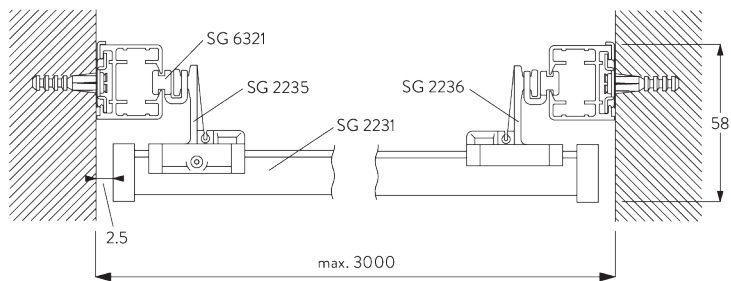


B. INSTALLATION OPTIONS



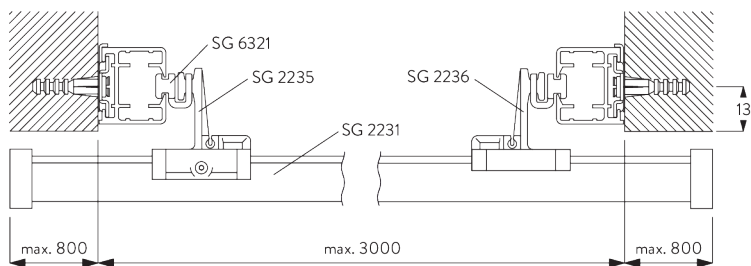
Type A

- SG 2145: *Glider*
- SG 2759: *Profile*



Type B (Profiles covered)

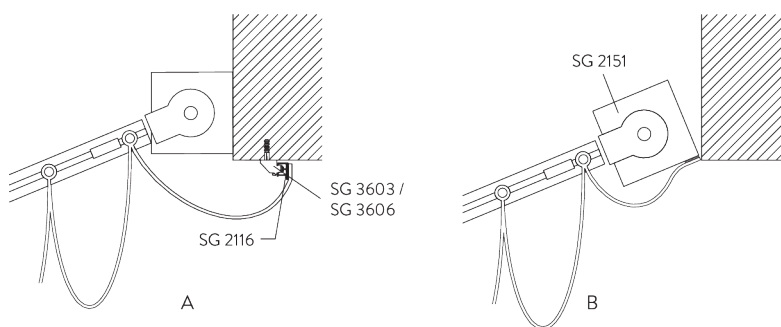
- SG 2231: Profile
- SG 2235: Glider with screw
- SG 2236: Glider without screw
- SG 6321: Glider



Type C (Cantilever version to cover side profiles)

- SG 2231: Profile
- SG 2235: Glider with screw
- SG 2236: Glider without screw
- SG 6321: Glider

C. FABRIC FIXING



A: Fixing of fabric with profile SG 2116 (standard)

B: Fixing of fabric directly on headrail cassette

MOTOR & CONTROLS

A. MOTOR FEATURES

Motors	SG 2160	SG 11328
Motor Features		
Mechanical end-stop	●	●
Mechanical revolution counter (limited revolution)	●	●
Noiseless stop	●	●
IP class	IP 44	IP 44
Control Features		
Mains power control	●	●
SG Control L (external receiver required)	●	●
SG Control R (external receiver required)	●	●
Suitable for most major home automation systems (with suitable interface)	●	●

B. MOTOR SPECIFICATIONS

Motors	Voltage	Current	Frequency	Speed
SG 2160	230 V AC	0.5 A	50 Hz	26 rpm
SG 11328	120 V AC	1.3 A	60 Hz	30 rpm

C. OPERATING METHODS

See catalogue "controls" for details.

Wall Switch



System can be operated by fixed wall switch.

SG Control L



Various radio hand-held and wall transmitters available.
An external receiver is required.



Silent Gliss Move App.

SG Control R



*Various radio hand-held and wall transmitters available.
An external receiver is required.*

D. WIRING DIAGRAMS



Refer to Silent Gliss website.

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (cross rods, etc.).
- Stack size depends on fabric make-up where applicable.

Fitting












- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!












Child Safety

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.











PARTS


A. STANDARD PARTS

	SG 2116 Velcro profile
	SG 2131 End cover
	SG 2145 Glider
	SG 2151 Profile
	SG 2152 Bearing shell
	SG 2153 Pulley
	SG 2154 End cover
	SG 2156 Shaft
	SG 2160 Motor 230V AC, JA 06/26 soft
	SG 2191 Profile
	SG 2193 Guide return
	SG 2230 Drive
	SG 2242 Connector
	SG 2245 Shaft connector


	SG 2247 Set Elero 230V
	SG 2539 Tape
	SG 2613 Connector
	SG 2759 Profile
	SG 3004 Clamp
	SG 3603 Bracket
	SG 3825 Clamp
	SG 5005 Belt connector
	SG 5130 Driving belt
	SG 6086 Spring stop
	SG 6321 Glider
	SG 9917 Hirschmann portable socket-outlet STAK 3 N

B. OPTIONAL PARTS

	SG 2138 T-bracket 1 clamp
	SG 2139 T-bracket 2 clamps
	SG 2144 Profile ø 8 mm
	SG 2146 Glider
	SG 2231 Profile
	SG 2235 Cross glider
	SG 2236 Cross profile glider
	SG 2237 Overlap arm right
	SG 2238 Overlap arm left
	SG 2239 Guide
	SG 2241 Halter
	SG 2243 End cover
	SG 2246 Rod PVC ø 5 mm
	SG 2248 Profile

**SG 2249**


Holder

**SG 2255**


Brake

**SG 2510**


Velcro profile

**SG 3066**

T-Bracket

**SG 3181**


Bracket 1 clamp

**SG 3182**

Bracket 2 clamps

**SG 3606**

Clip

**SG 3832**

Bracket

**SG 5115**


Connection bridge

**SG 5736**


Relay socket

**SG 6146**


Hook

**SG 6322**


Distance cord

**SG 6340**


Roller

**SG 9068**


Radio receiver Revio

**SG 9916**


Hirschmann plug set

**SG 9944**


Radio receiver 1 channel

**SG 9945**


Radio receiver 1 channel

**SG 9959**


Central control unit relay

**SG 9960**


Move server set

**SG 9961**


Move transmitter

**SG 10300**


Radio hand held 1 channel

**SG 10302**

Radio hand held 5+1 channel

**SG 10303**


Radio hand held 10+2+1 channel

**SG 10804**


Radio hand held 15+5+1 channel

**SG 11328**

Motor 120V AC, JA 08/30 soft, UL

**SG 11480**


Radio wall transmitter 1 channel

**SG 11490**


Radio wall transmitter 5+1 channel

**SG 20336**


Hand held transmitter 8 channel

**SG 20907**


Control module motor type R

**SG 20913**


Wall switch single channel

**SG 20914**


Wall switch 8 channel

**SG 20917**

Pattress box

**SG 20918**

Control module motor type A,AA

**SG 20919**

Control module motor type R

