



ROMAN BLIND SYSTEMS

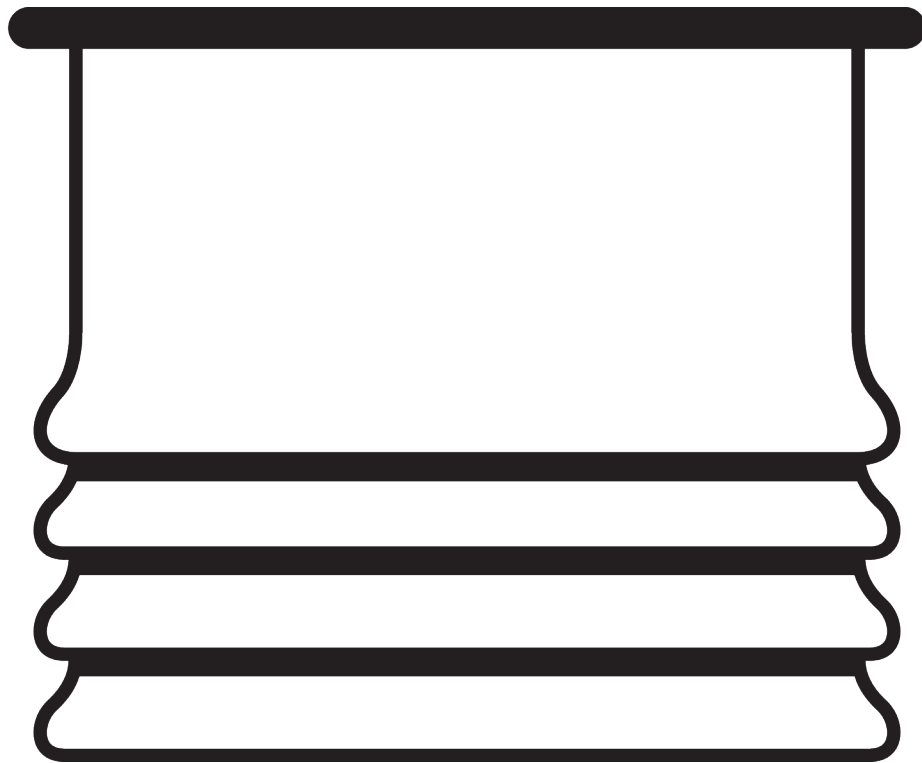

APPLICATION CHART

<u>PAGE</u>	<u>SYSTEM</u>	<u>OPERATION</u>	<u>DIMENSION</u>	← max. →	↑ max. ↓	kg _{max.}
3	SG 2020		S - M	2.5 m	3 m	3 kg
12	SG 2090		S	1 m	2 m	0.7 kg
18	SG 2120		L	4 m	6 m	8 kg
27	SG 2210		S - M	3 m	3 m	2 kg
36	SG 2320		S - M	3 m	3 m	2.5 kg
46	SG 2330		S - M	3 m	3 m	4.5 kg
56	SG 2345		S - M	6 m	6 m	2.5 kg
66	SG 2350		S - L	6 m	6 m	15 kg
79	SG 2304		S - M	2 m	3.4 m	2 kg
88	SG 2305		S - M	3 m	3.4 m	4 kg

SG 2020

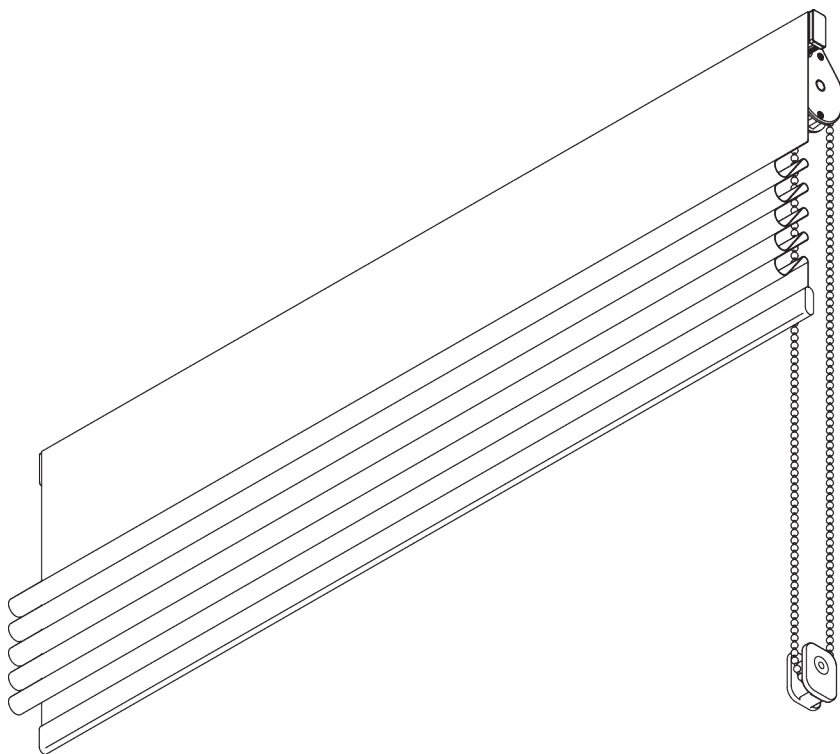

PRODUCT INFORMATION

- **Operation:** chain
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016, anodised aluminum
- **Fabrics:** refer to Silent Gliss fabric collection

Features:


- 1-to-1 gear drive
- Bead chain

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS



2.5 m



3 m




7.5 m²




3 kg

B. PROFILE

Profile information




SG 2116
Velcro profile




SG 2004
Bottom bar 20x7 mm




SG 2135
Rod steel ø 3 mm



SG 2137
Rod fiberglass ø 4 mm




SG 2144
Profile ø 8 mm



SG 2111
Shaft

C. HOW TO MEASURE

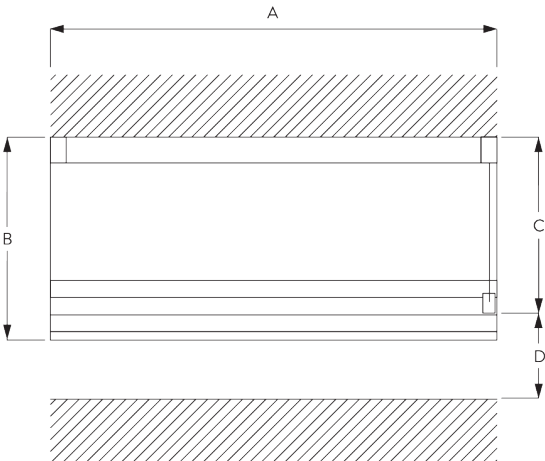


- A: System width
- B: System height
- C: Chain height
- D: Safety retainer SG 10731 min. 150 cm above floor

FITTING


A. FITTING INFORMATION

Fixing points

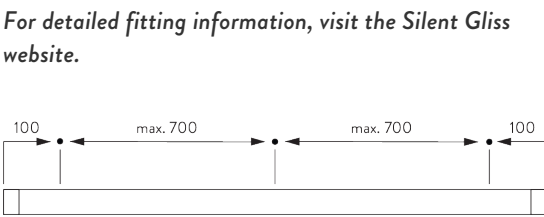

B. CEILING FITTING


Bracket SG 3603

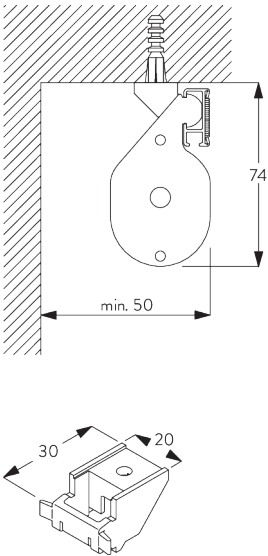


SG 3603
Bracket

C. WALL FITTING


Bracket SG 3655, SG 3660



Bracket	X mm
SG 3655	53
SG 3660	68




SG 3655
Bracket 50 mm




SG 3660
Bracket 65 mm


Smart Fix



Smart Fix SG 11200 - SG 11205:
Screw SG 10492 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215:
Screw SG 10492 (M4x8) needed.

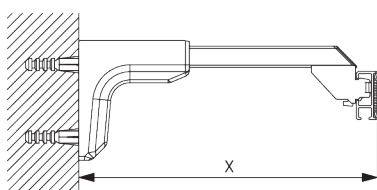

Universal Smart Fix SG 11154 - SG 11156:
Screw SG 10277 (M4x12) needed.

Smart Fix	X mm
SG 11200 / SG 11210	77
SG 11201 / SG 11211	97
SG 11202 / SG 11212	117
SG 11203 / SG 11213	137
SG 11204 / SG 11214	167
SG 11205 / SG 11215	217
SG 11154	127-155
SG 11155	157-185
SG 11156	207-235




SG 3603
Bracket




SG 10277
Pan head screw M4x12




SG 10492
Pan head screw M4x8




SG 11200
Smart Fix 60 mm




SG 11201
Smart Fix 80 mm




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm

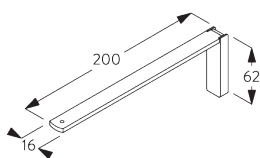


SG 11205
Smart Fix 200 mm




SG 11210
Square Smart Fix 60 mm



SG 11211
Square Smart Fix 80 mm




SG 11212
Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm




SG 11215

Square Smart Fix 200 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155

Universal Smart Fix 150 mm




SG 11156

Universal Smart Fix 200 mm

SYSTEM OPTIONS

A. FABRIC MAKE-UP

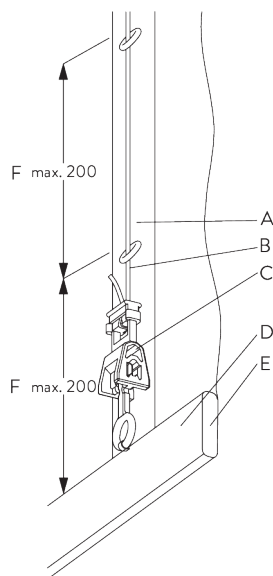

Type A (Standard)

Soft fold ring tape SG 2164:

A: Ring tape SG 2164


B: Tape SG 2035

C: Child safety hook set SG 3164

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm

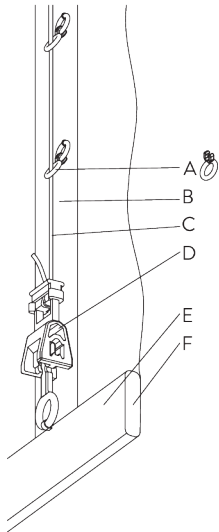

Type B

Soft fold ring tape SG 2164:

A: Child safety eyelet soft fold SG 3078


B: Ring tape SG 2164

C: Tape SG 2035

D: Child safety hook set SG 3164

E: Hollow hem

F: Bottom bar SG 2004

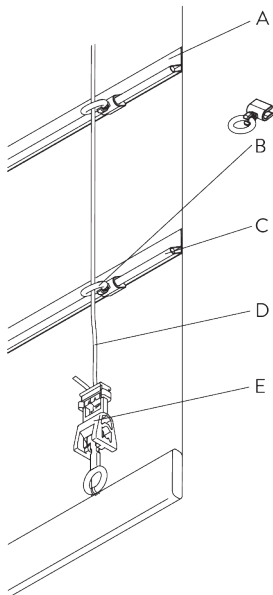

Type C


A: Tape SG 2136

B: Child safety eyelet hard fold SG 3069

C: Rod SG 2135

D: Tape SG 2035

E: Child safety hook set SG 3164

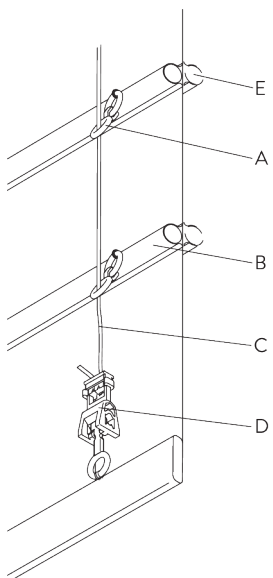

Type D

A: Child safety eyelet set SG 3161 / SG 3165

B: Tube SG 2144

C: Tape SG 2035

D: Child safety hook set SG 3164

E: Option: tube SG 2144 / SG 2137 can be installed to room side

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, cross rods, etc.).
- Stack size is typically 15-20% of system height.

Fitting









- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!

Child Safety










- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.













PARTS


A. STANDARD PARTS

	SG 2004 Bottom bar 20x7 mm
	SG 2032 Take-up spool
	SG 2049 Chain drive
	SG 2059 Safety clip
	SG 2111 Shaft
	SG 2116 Velcro profile
	SG 2131 End cover
	SG 2539 Tape
	SG 2865 Bead chain connector ø 4.6 mm
	SG 2872 Bead chain plastic ø 4.6 mm
	SG 3056 Tape centralizer
	SG 3164 Child safety hook set
	SG 3603 Bracket
	SG 10731 Child safety retainer set

B. OPTIONAL PARTS


	SG 2006 Bottom bar 28x3 mm
	SG 2023 Take-up spool
	SG 2091 End cover
	SG 2093 Ring
	SG 2135 Rod steel ø 3 mm
	SG 2136 Rod tape
	SG 2144 Profile ø 8 mm
	SG 2164 Ring tape
	SG 3054 Hook eyelet
	SG 3055 Hook
	SG 3069 Child safety eyelet
	SG 3074 Loop tape
	SG 3161 Child safety eyelet set
	SG 3165 Child safety eyelet set

	SG 3166 Child safety tape set
	SG 3340 Cord/chain weight
	SG 3655 Bracket 50 mm
	SG 3660 Bracket 65 mm
	SG 10277 Pan head screw M4x12
	SG 10492 Pan head screw M4x8
	SG 11154 Universal Smart Fix 120 mm
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11200 Smart Fix 60 mm
	SG 11201 Smart Fix 80 mm
	SG 11202 Smart Fix 100 mm
	SG 11203 Smart Fix 120 mm
	SG 11204 Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm



SG 11214

Square Smart Fix 150 mm



SG 11215



Square Smart Fix 200 mm



SG 11482

Ring

SG 2090

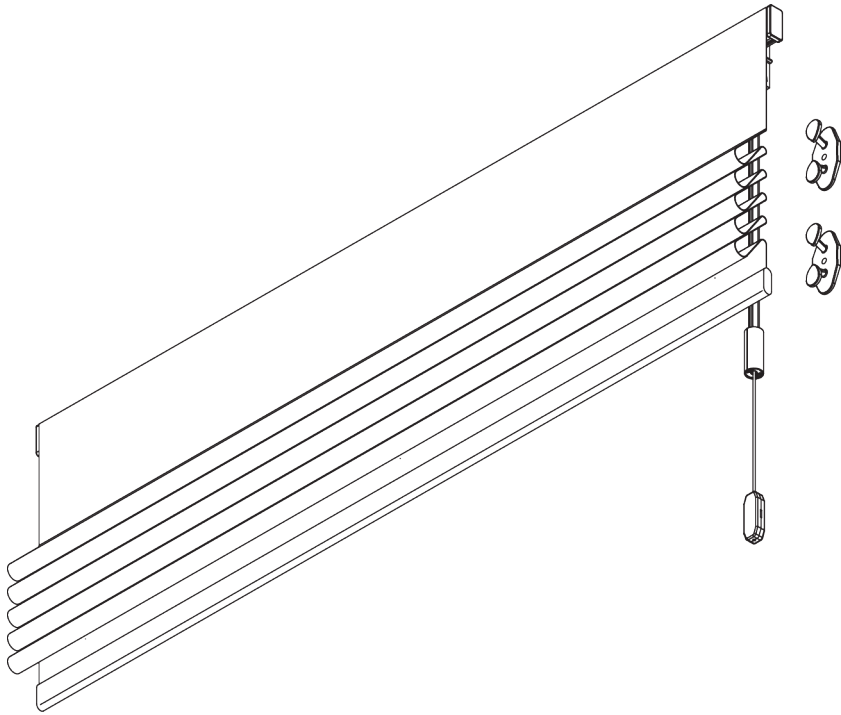

PRODUCT INFORMATION

- **Operation:** cord
- **Range:** S
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- Easy installation on window sash


SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS




B. PROFILE

Profile information

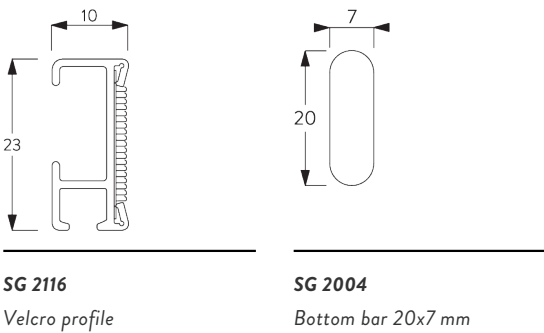

C. HOW TO MEASURE

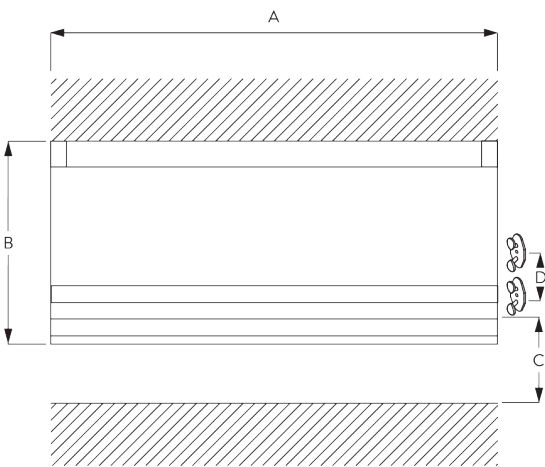


FITTING

A. FITTING INFORMATION



Fixing points

For detailed fitting information, visit the [Silent Gliss website](#).



B. CEILING FITTING



Bracket SG 3603



SG 3603
Bracket


C. WALL FITTING

Clip bracket SG 3666




SG 3666
Clip


Bracket SG 3630,
SG 3655, SG 3660




Bracket	X mm
SG 3630	38
SG 3655	53
SG 3660	68



SG 3630
Bracket 35 mm




SG 3655
Bracket 50 mm



SG 3660
Bracket 65 mm

SYSTEM OPTIONS

A. FABRIC MAKE-UP

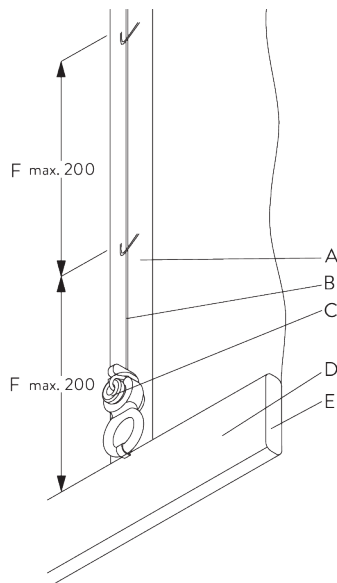

Type A

Loop tape SG 3074:

A: Loop tape SG 3074


B: Cord SG 2216

C: Child safety fastener set SG 3167

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm!

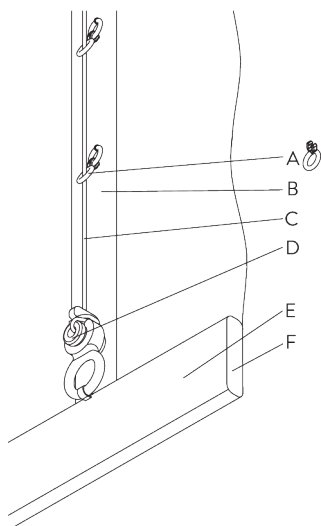

Type B

Ring tape SG 2164:

A: Child Safety Eyelet soft fold SG 3078

B: Ring tape SG 2164

C: Cord SG 2216

D: Child safety fastener set SG 3167

E: Hollow hem

F: Bottom bar SG 2004

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, cross rods, etc.).
- Stack size is typically 15-20% of system height.

Fitting

- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.








- *Qualified fitter must use appropriate screws / fixings for each situation.*
- *Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.*
- *Check space for cables and plugs!*

Child Safety








- *All relevant Silent Gliss systems correspond to child safety EN 13120.*
- *All parties involved must comply with EN 13120.*

PARTS



A. STANDARD PARTS

	SG 2004 Bottom bar 20x7 mm
	SG 2116 Velcro profile
	SG 2131 End cover
	SG 2215 Eyelet
	SG 2216 Cord ø 0.85 mm
	SG 2539 Tape
	SG 2826 Bead chain connector (2 x)
	SG 3074 Loop tape
	SG 3167 Child safety fastener set
	SG 3185 Cord lock
	SG 3637 Cord ø 1.5 mm
	SG 3666 Clip
	SG 10742 Child safety cord cleat
	SG 10745 Child safety break away cord connector

B. OPTIONAL PARTS

	SG 2093 Ring
	SG 2164 Ring tape
	SG 3055 Hook
	SG 3603 Bracket
	SG 3630 Bracket 35 mm
	SG 3655 Bracket 50 mm
	SG 3660 Bracket 65 mm
	SG 11482 Ring

SG 2120

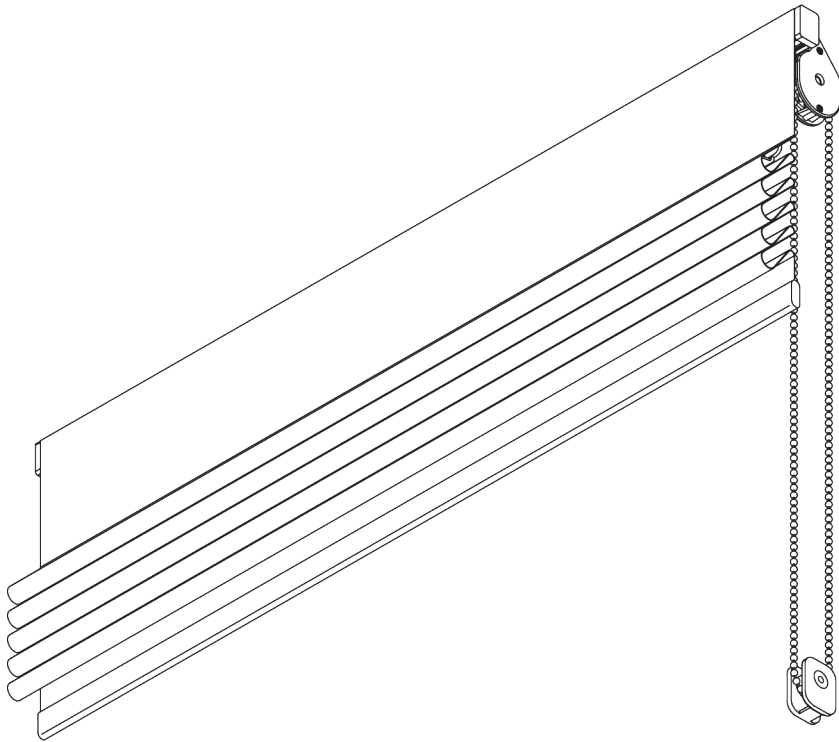

PRODUCT INFORMATION

- **Operation:** chain
- **Range:** L
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016, anodised aluminum
- **Fabrics:** refer to Silent Gliss fabric collection

Features:


- 5-to-1 gear drive
- Bead chain

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS



4 m



6 m




8 kg




24 m²

B. PROFILE


Profile Information



SG 2211
Velcro profile




SG 2004
Bottom bar 20x7 mm




SG 2111
Shaft



SG 2135
Rod steel ø 3 mm




SG 2137
Rod fiberglass ø 4 mm



SG 2144
Profile ø 8 mm

C. HOW TO MEASURE

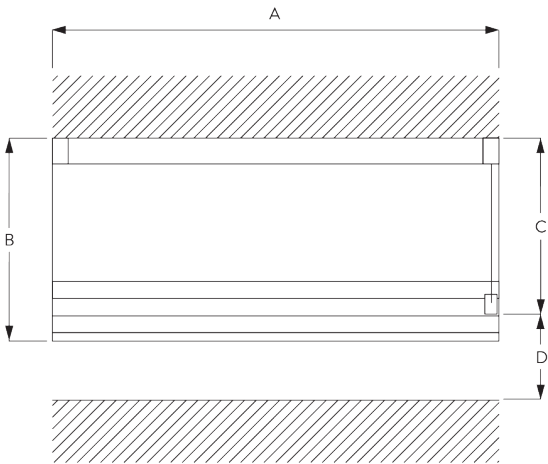


A: System width
B: System height
C: Chain height
D: Safety retainer SG 10731 min. 150 cm above floor

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the [Silent Gliss website](#).

Fixing points



B. CEILING FITTING



Bracket SG 3603

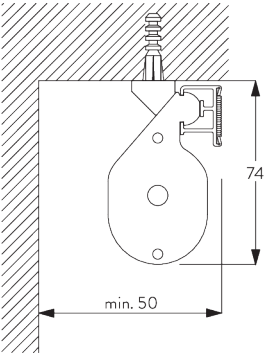


SG 3603
Bracket

C. WALL FITTING

Bracket SG 3655, SG 3660




SG 3655
Bracket 50 mm




SG 3660
Bracket 65 mm

Bracket	X mm
SG 3655	58
SG 3660	73


Smart Fix



Smart Fix SG 11200 - SG 11205 and bracket SG 3603:
Screw SG 10492 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215 and bracket SG 3603:
Screw SG 10492 (M4x8) needed.

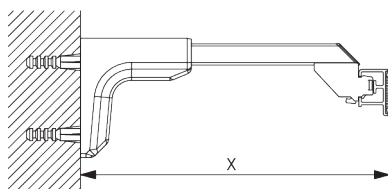

Universal Smart Fix 11154-11156 and bracket SG 3603:
Screw SG 10277 (M4x12) needed.

Smart Fix	X mm
SG 11200 / SG 11210	80
SG 11201 / SG 11211	100
SG 11202 / SG 11212	120
SG 11203 / SG 11213	140
SG 11204 / SG 11214	170
SG 11205 / SG 11215	220
SG 11154	132-160
SG 11155	162-190
SG 11156	212-240




SG 3603
Bracket




SG 10277
Pan head screw M4x12




SG 10492
Pan head screw M4x8




SG 11200
Smart Fix 60 mm




SG 11201
Smart Fix 80 mm




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm




SG 11205
Smart Fix 200 mm




SG 11210
Square Smart Fix 60 mm



SG 11211
Square Smart Fix 80 mm




SG 11212
Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm




SG 11215

Square Smart Fix 200 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155

Universal Smart Fix 150 mm




SG 11156

Universal Smart Fix 200 mm

SYSTEM OPTIONS

A. FABRIC MAKE-UP

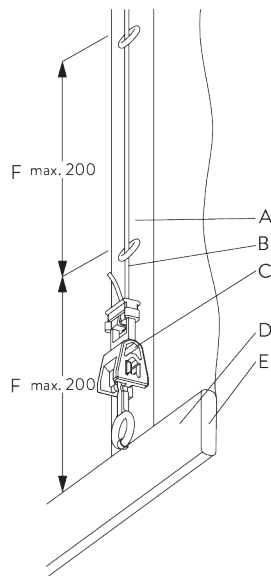

Type A (Standard)

Soft fold ring tape SG 2164:

A: Ring tape SG 2164


B: Tape SG 2163

C: Child safety hook set SG 3164

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm

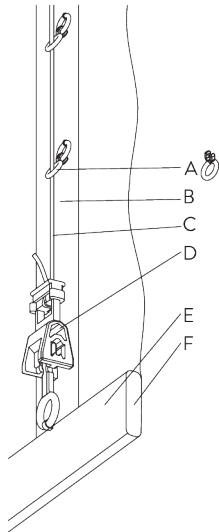

Type B

Soft fold ring tape SG 2164:

A: Child safety eyelet soft fold SG 3078


B: Ring tape SG 2164

C: Tape SG 2163

D: Child safety hook set SG 3164

E: Hollow hem

F: Bottom bar SG 2004

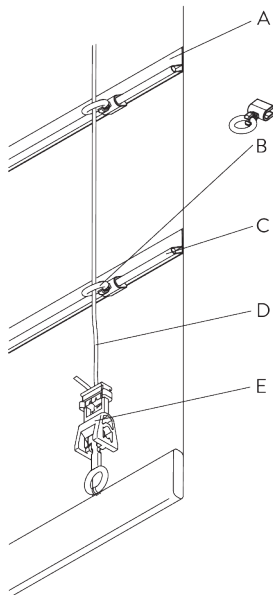

Type C


A: Tape SG 2136

B: Child safety eyelet hard fold SG 3069

C: Rod SG 2135

D: Tape SG 2163

E: Child safety hook set SG 3164

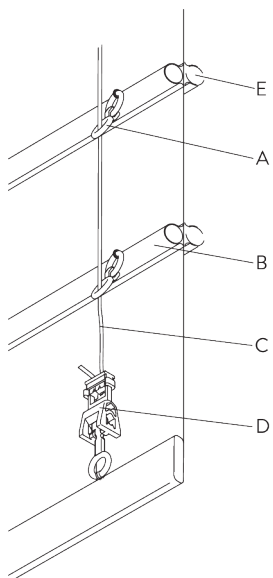

Type D

A: Child safety eyelet set SG 3165

B: Tube SG 2144

C: Tape SG 2163

D: Child safety hook set SG 3164

E: Option: tube SG 2144 / SG 2137 can be installed to room side

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, cross rods, etc.).
- Stack size is typically 15-20% of system height.

Fitting






- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!

Child Safety








- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.














PARTS

A. STANDARD PARTS

	SG 2004 Bottom bar 20x7 mm
	SG 2049 Chain drive
	SG 2059 Safety clip
	SG 2081 Take-up spool
	SG 2111 Shaft
	SG 2163 Tape
	SG 2179 End cover
	SG 2211 Velcro profile
	SG 2539 Tape
	SG 2865 Bead chain connector ø 4.6 mm
	SG 2872 Bead chain plastic ø 4.6 mm
	SG 3164 Child safety hook set
	SG 3603 Bracket
	SG 10731 Child safety retainer set

B. OPTIONAL PARTS


	SG 2006 Bottom bar 28x3 mm
	SG 2091 End cover
	SG 2093 Ring
	SG 2135 Rod steel ø 3 mm
	SG 2136 Rod tape
	SG 2137 Rod fiberglass ø 4 mm
	SG 2144 Profile ø 8 mm
	SG 2164 Ring tape
	SG 3054 Hook eyelet
	SG 3055 Hook
	SG 3069 Child safety eyelet
	SG 3074 Loop tape
	SG 3161 Child safety eyelet set
	SG 3165 Child safety eyelet set

	SG 3166 Child safety tape set
	SG 3340 Cord/chain weight
	SG 3655 Bracket 50 mm
	SG 3660 Bracket 65 mm
	SG 10277 Pan head screw M4x12
	SG 10492 Pan head screw M4x8
	SG 11154 Universal Smart Fix 120 mm
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11200 Smart Fix 60 mm
	SG 11201 Smart Fix 80 mm
	SG 11202 Smart Fix 100 mm
	SG 11203 Smart Fix 120 mm
	SG 11204 Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm



SG 11215


Square Smart Fix 200 mm



SG 11482

Ring

SG 2210

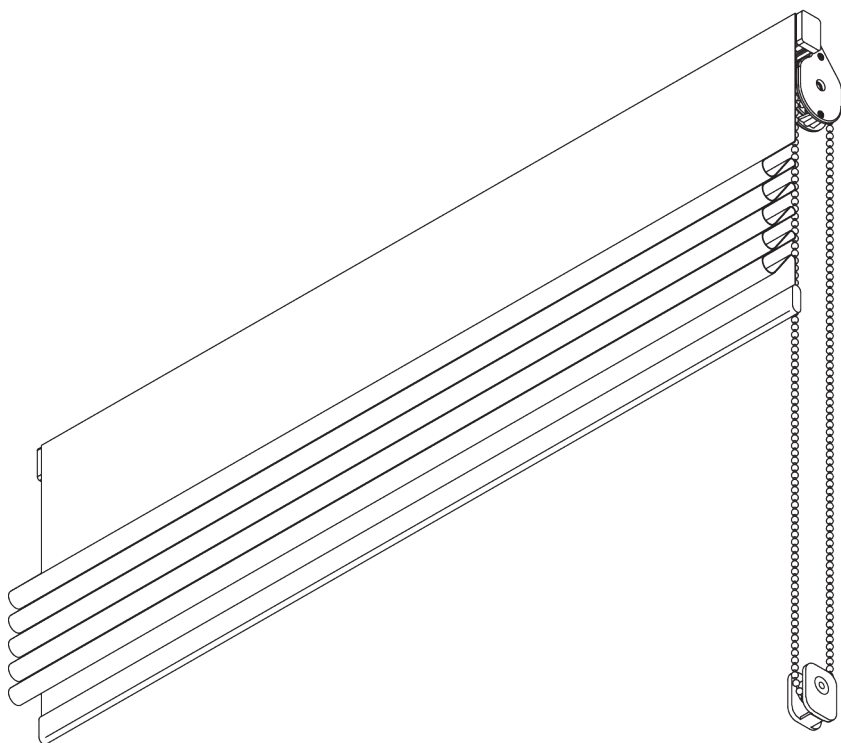

PRODUCT INFORMATION


- **Operation:** chain
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- 1-to-1 gear drive
- Bead chain
- Easy washing / changing of the fabric


SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS

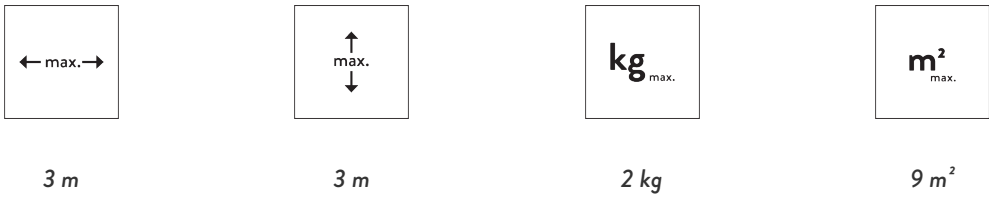


B. PROFILE

Profile information

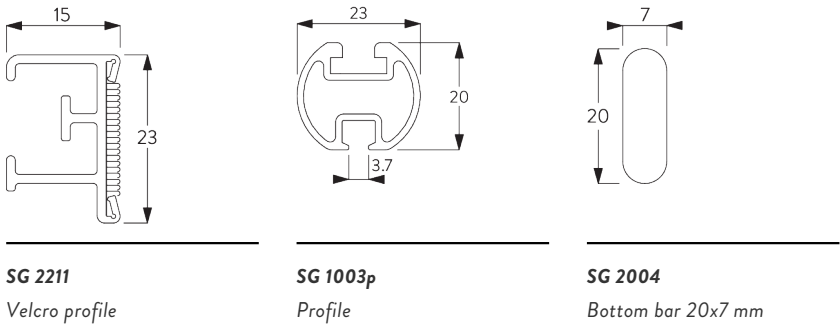


C. HOW TO MEASURE

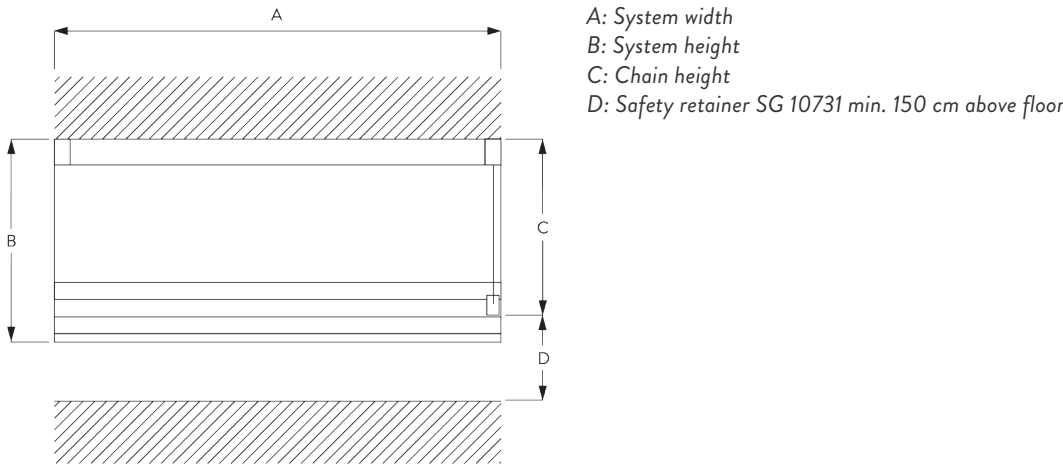

FITTING



A. FITTING INFORMATION

Fixing points

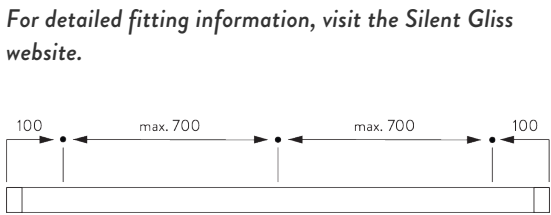

B. CEILING FITTING



Bracket SG 3603

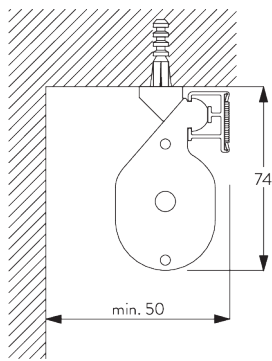


SG 3603
Bracket

C. WALL FITTING

**Bracket SG 3655,
SG 3660**




SG 3655
Bracket 50 mm



SG 3660
Bracket 65 mm


<i>Bracket</i>	<i>X mm</i>
SG 3655	58
SG 3660	73

Smart Fix




Smart Fix SG 11200 - SG 11205 and bracket SG 3603:
Screw SG 10492 (M4x8) needed.

<i>Smart Fix</i>	<i>X mm</i>
SG 11200 / SG 11210	80
SG 11201 / SG 11211	100
SG 11202 / SG 11212	120
SG 11203 / SG 11213	140
SG 11204 / SG 11214	170
SG 11205 / SG 11215	220
SG 11154	132-160
SG 11155	162-190
SG 11156	212-240




Square Smart Fix SG 11210 - SG 11215 and bracket SG 3603:

Screw SG 10492 (M4x8) needed.

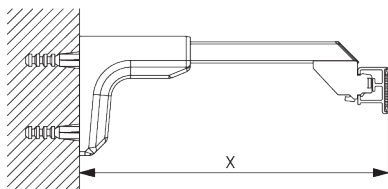

Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3603:

Screw SG 10277 (M4x12) needed.



SG 3603

Bracket




SG 10277

Pan head screw M4x12




SG 10492

Pan head screw M4x8




SG 11200

Smart Fix 60 mm




SG 11201

Smart Fix 80 mm




SG 11202

Smart Fix 100 mm




SG 11203

Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm




SG 11215

Square Smart Fix 200 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155

Universal Smart Fix 150 mm




SG 11156

Universal Smart Fix 200 mm

SYSTEM OPTIONS

A. FABRIC MAKE-UP

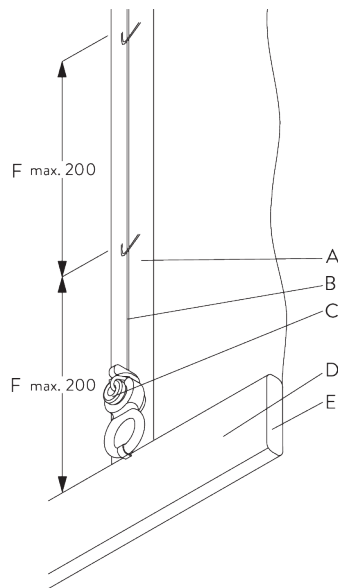

Type A

Loop tape SG 3074:

A: Loop tape SG 3074


B: Cord SG 2216

C: Child safety fastener set SG 3167

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm!

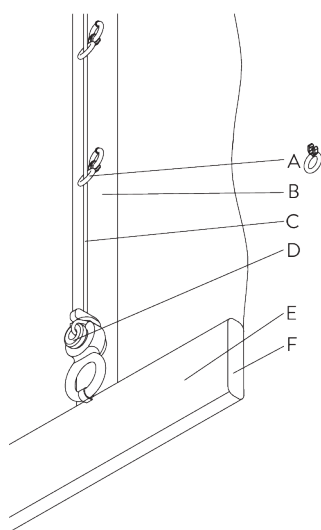

Type B

Ring tape SG 2164:

A: Child Safety Eyelet soft fold SG 3078


B: Ring tape SG 2164

C: Cord SG 2216

D: Child safety fastener set SG 3167


E: Hollow hem

F: Bottom bar SG 2004

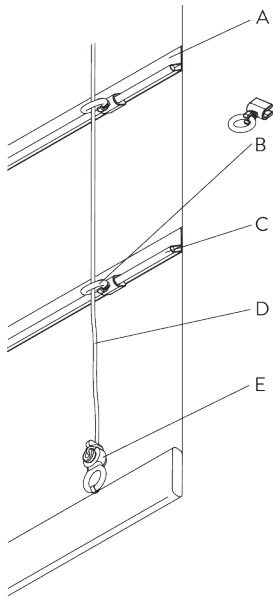

Type C (hardfold)

- A: Tape SG 2136
- B: Child safety eyelet hard fold SG 3069
- C: Rod SG 2135
- D: Tape SG 2035
- E: Child safety hook set SG 3167

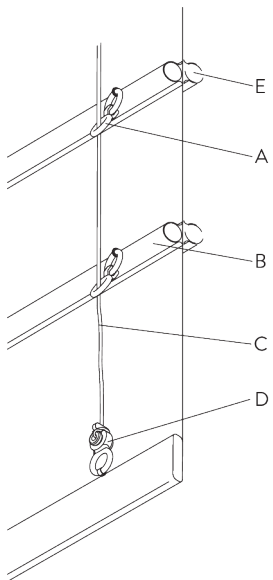

Type D (hardfold)

- A: Child safety eyelet set SG 3161 / SG 3165
- B: Rod SG 2135 / SG 2137
- C: Tape SG 2035
- D: Child safety hook set SG 3167
- E: Option: Rod SG 2135 / SG 2137 can be installed to room side

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, cross rods, etc.).
- Stack size is typically 15-20% of system height.

Fitting









- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!






Child Safety

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.












PARTS
















A. STANDARD PARTS

	SG 1003p Profile
	SG 2004 Bottom bar 20x7 mm
	SG 2049 Chain drive
	SG 2101 Eyelet
	SG 2179 End cover
	SG 2201 Eyelet
	SG 2211 Velcro profile
	SG 2212 Tube adapter
	SG 2213 Tube adapter
	SG 2215 Eyelet
	SG 2216 Cord ø 0.85 mm
	SG 2219 Eyelet
	SG 2227 Pin
	SG 2539 Tape



	SG 2865 Bead chain connector ø 4.6 mm
	SG 2872 Bead chain plastic ø 4.6 mm
	SG 3074 Loop tape
	SG 3167 Child safety fastener set
	SG 3603 Bracket
	SG 10731 Child safety retainer set

B. OPTIONAL PARTS

	SG 2093 Ring
	SG 2135 Rod steel ø 3 mm
	SG 2137 Rod fiberglass ø 4 mm
	SG 2164 Ring tape
	SG 3055 Hook
	SG 3069 Child safety eyelet
	SG 3161 Child safety eyelet set
	SG 3340 Cord/chain weight
	SG 3655 Bracket 50 mm
	SG 3660 Bracket 65 mm
	SG 4845 Bead chain metal ø 4.5 mm
	SG 10277 Pan head screw M4x12
	SG 10492 Pan head screw M4x8
	SG 11154 Universal Smart Fix 120 mm

	SG 11155 Universal Smart Fix 150 mm		SG 11482 Ring
	SG 11156 Universal Smart Fix 200 mm		
	SG 11200 Smart Fix 60 mm		
	SG 11201 Smart Fix 80 mm		
	SG 11202 Smart Fix 100 mm		
	SG 11203 Smart Fix 120 mm		
	SG 11204 Smart Fix 150 mm		
	SG 11205 Smart Fix 200 mm		
	SG 11210 Square Smart Fix 60 mm		
	SG 11211 Square Smart Fix 80 mm		
	SG 11212 Square Smart Fix 100 mm		
	SG 11213 Square Smart Fix 120 mm		
	SG 11214 Square Smart Fix 150 mm		
	SG 11215 Square Smart Fix 200 mm		

SG 2320

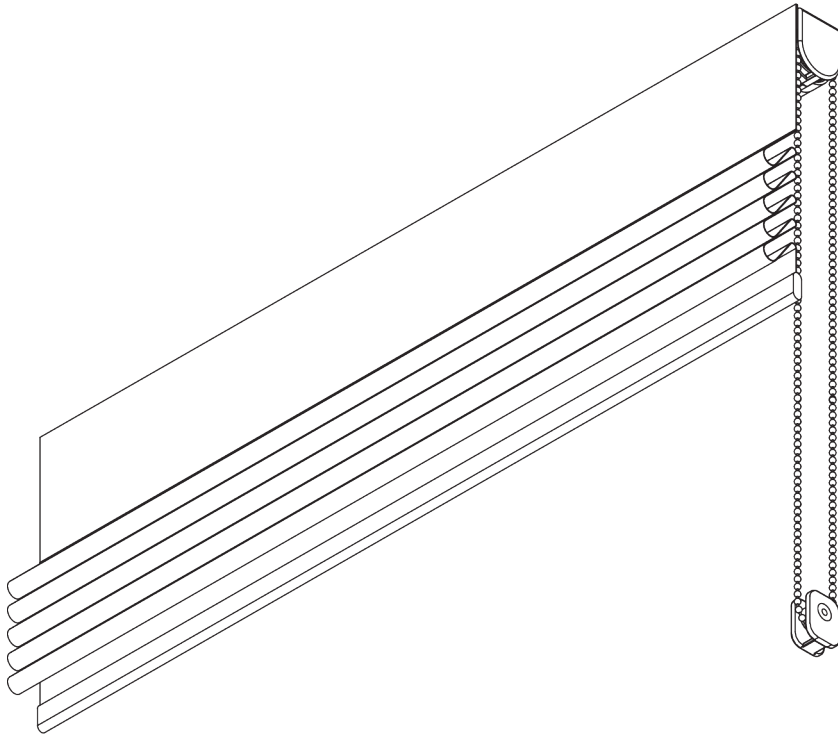

PRODUCT INFORMATION

- **Operation:** chain
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016
- **Fabrics:** refer to Silent Gliss fabric collection

Features:


- 1-to-1 gear drive
- Stainless steel bead chain
- Enclosed headrail

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



3 m



60 cm



3 m




9 m²




2.5 kg

B. PROFILE


Profile information




SG 2321
Profile



SG 8214
Profile ø 18 mm




SG 2004
Bottom bar 20x7 mm




SG 2006
Bottom bar 28x3 mm



SG 2135
Rod steel ø 3 mm




SG 2137
Rod fiberglass ø 4 mm



SG 2144
Profile ø 8 mm

C. HOW TO MEASURE

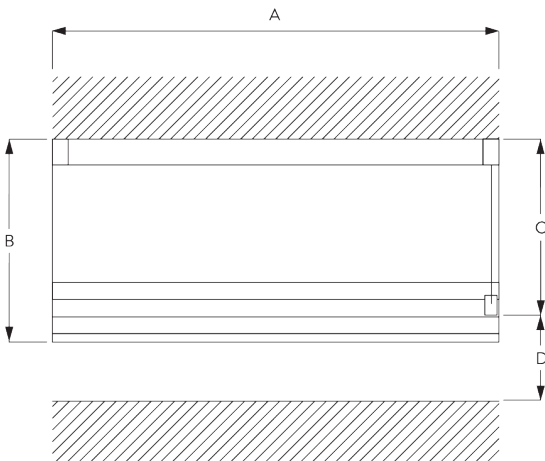


A: System width
B: System height
C: Chain height
D: Safety retainer SG 10731 min. 150 cm above floor

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the [Silent Gliss website](#).

Fixing points



B. CEILING FITTING


Bracket SG 2616




SG 2616
Bracket

C. WALL FITTING

Smart Fix




Smart Fix SG 11200 - SG 11205 and bracket SG 2616:
Screw SG 10395 (M4x6) needed.




Square Smart Fix SG 11210 - SG 11215 and bracket SG 2616:
Screw SG 10395 (M4x6) needed.

Smart Fix	X mm
SG 11200 / SG 11210	70-76
SG 11201 / SG 11211	90-96
SG 11202 / SG 11212	110-116
SG 11203 / SG 11213	130-136
SG 11204 / SG 11214	160-166
SG 11205 / SG 11215	210-216
SG 11154	126-154
SG 11155	156-184
SG 11156	206-234

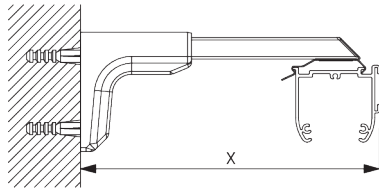

**Universal Smart Fix SG 11154 - SG 11156 and
bracket SG 2616:**

Screw SG 10492 (M4x8) needed.



SG 2616

Bracket




SG 10395

Pan head screw M4x6




SG 10492

Pan head screw M4x8




SG 11200

Smart Fix 60 mm




SG 11201

Smart Fix 80 mm




SG 11202

Smart Fix 100 mm




SG 11203

Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm




SG 11215

Square Smart Fix 200 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155



Universal Smart Fix 150 mm



SG 11156




Universal Smart Fix 200 mm

Bracket SG 2343




SG 2343
Bracket 46 mm


D. FITTING WITH
SIDE GUIDE
OPTION




SG 2338
Side guide wire holder




SG 8235
Side guide wire base short




SG 8236
Side guide wire base long



SG 8237
Side guide wire holder




SG 8249
Side guide device



SG 10120
Side guide wire ø 0.9 mm

SYSTEM OPTIONS

A. FABRIC MAKE-UP

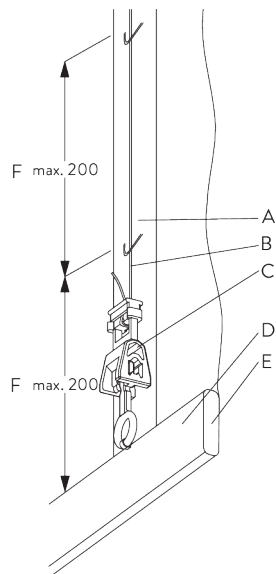

Type A (Standard)

Loop tape SG 3074:

A: Loop tape SG 3074 / SG 2164


B: Cord SG 2216

C: Child safety hook set SG 3164

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm

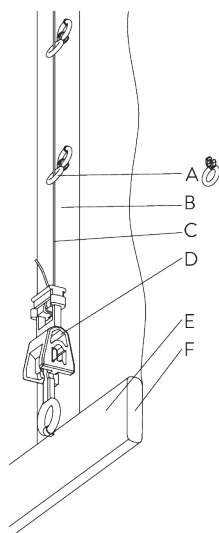

Type B

Ring tape SG 2164:

A: Child safety eyelet soft fold SG 3078


B: Ring tape SG 2164

C: Cord SG 2216

D: Child safety hook set SG 3164


E: Hollow hem

F: Bottom bar SG 2004

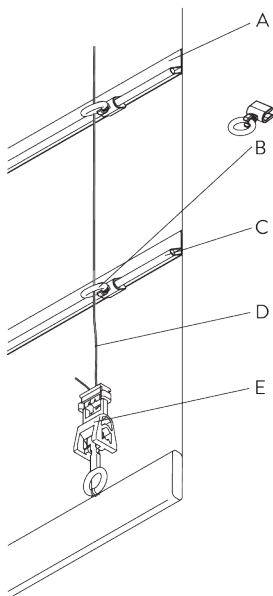

Type C


- A: Tape SG 2136
- B: Child safety eyelet hard fold SG 3069
- C: Rod SG 2135
- D: Cord SG 2216
- E: Child safety hook set SG 3164

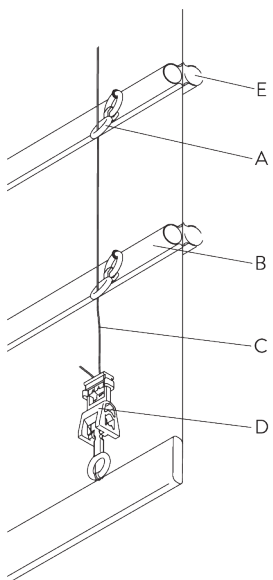

Type D

- A: Child safety eyelet set SG 3161 / SG 3165
- B: Tube SG 2144
- C: Cord SG 2216
- D: Child safety hook set SG 3164
- E: Option: tube SG 2144 / SG 2137 can be installed to room side

B. SIDE GUIDES

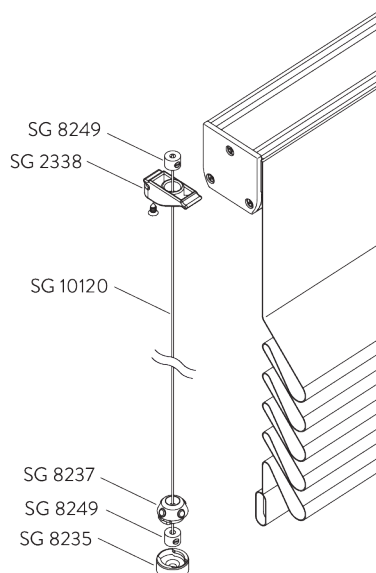

Additional parts:

- 2x SG 2338 Side guide wire holder
- 2x SG 8235 Side guide wire base short
- 2x SG 8237 Side guide wire holder
- 4x SG 8249 Side guide device
- 2x SG 10120 Side guide wire $\varnothing$ 0.9 mm

Note:

- Up to 15° from vertical

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, cross rods, etc.).
- Stack size is typically 15-20% of system height.

Fitting





- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!




Child Safety

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.







PARTS






















A. STANDARD PARTS

	SG 2004 Bottom bar 20x7 mm
	SG 2216 Cord ø 0.85 mm
	SG 2221 Velcro tape
	SG 2321 Profile
	SG 2322 Pin
	SG 2323 Shell
	SG 2327 Tube adapter
	SG 2328 Tube adapter
	SG 2335 Drive case 1:1
	SG 2336 Support
	SG 2337 End cover
	SG 2339 Cover
	SG 2341 Chain wheel for steel bead chain
	SG 2344 Sleeve for metal bead chain



	SG 2539 Tape
	SG 2616 Bracket
	SG 3164 Child safety hook set
	SG 4845 Bead chain metal ø 4.5 mm
	SG 8214 Profile ø 18 mm
	SG 10139 Countersunk screw 2.9x6.5
	SG 10731 Child safety retainer set

B. OPTIONAL PARTS

	SG 2006 Bottom bar 28x3 mm
	SG 2091 End cover
	SG 2093 Ring
	SG 2135 Rod steel ø 3 mm
	SG 2136 Rod tape
	SG 2137 Rod fiberglass ø 4 mm
	SG 2144 Profile ø 8 mm
	SG 2164 Ring tape
	SG 2333 Chain wheel for plastic bead chain
	SG 2334 Sleeve for plastic bead chain
	SG 2338 Side guide wire holder
	SG 2343 Bracket 46 mm
	SG 2865 Bead chain connector ø 4.6 mm
	SG 2872 Bead chain plastic ø 4.6 mm

	SG 3055 Hook		SG 1154 Universal Smart Fix 120 mm		SG 11215 Square Smart Fix 200 mm
	SG 3069 Child safety eyelet		SG 1155 Universal Smart Fix 150 mm		SG 11482 Ring
	SG 3074 Loop tape		SG 1156 Universal Smart Fix 200 mm		
	SG 3161 Child safety eyelet set		SG 11200 Smart Fix 60 mm		
	SG 3165 Child safety eyelet set		SG 11201 Smart Fix 80 mm		
	SG 3166 Child safety tape set		SG 11202 Smart Fix 100 mm		
	SG 3340 Cord/chain weight		SG 11203 Smart Fix 120 mm		
	SG 8235 Side guide wire base short		SG 11204 Smart Fix 150 mm		
	SG 8236 Side guide wire base long		SG 11205 Smart Fix 200 mm		
	SG 8237 Side guide wire holder		SG 11210 Square Smart Fix 60 mm		
	SG 8249 Side guide device		SG 11211 Square Smart Fix 80 mm		
	SG 10120 Side guide wire ø 0.9 mm		SG 11212 Square Smart Fix 100 mm		
	SG 10395 Pan head screw M4x6		SG 11213 Square Smart Fix 120 mm		
	SG 10492 Pan head screw M4x8		SG 11214 Square Smart Fix 150 mm		

SG 2330

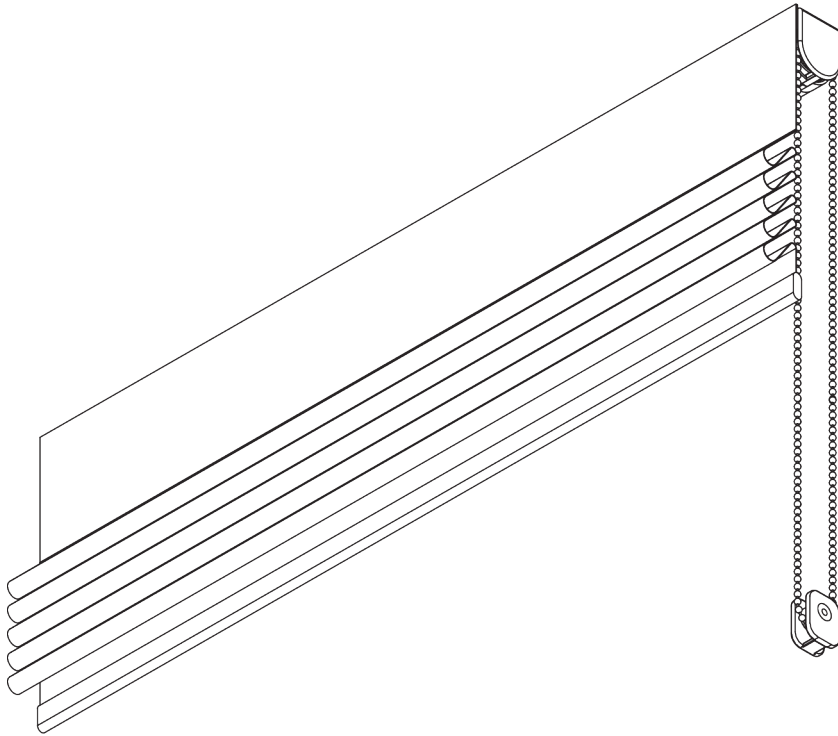

PRODUCT INFORMATION

- **Operation:** chain
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- 4-to-1 gear drive
- Stainless steel bead chain
- Enclosed headrail

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



3 m



60 cm



3 m




9 m²




4.5 kg

B. PROFILE


Profile information




SG 2321
Profile



SG 8214
Profile ø 18 mm




SG 2004
Bottom bar 20x7 mm




SG 2006
Bottom bar 28x3 mm



SG 2135
Rod steel ø 3 mm




SG 2137
Rod fiberglass ø 4 mm



SG 2144
Profile ø 8 mm

C. HOW TO MEASURE

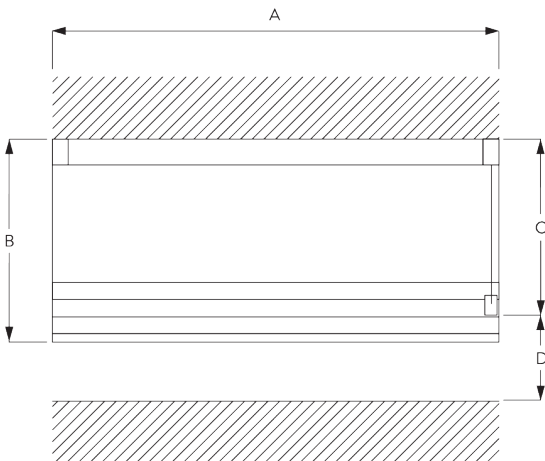


A: System width
B: System height
C: Chain height
D: Safety retainer SG 10731 min. 150 cm above floor

FITTING



A. FITTING INFORMATION

Fixing points

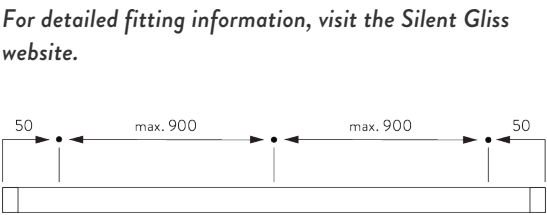

B. CEILING FITTING


Bracket SG 2616




SG 2616
Bracket

C. WALL FITTING

Smart Fix




Smart Fix SG 11200 - SG 11205 and bracket SG 2616:
Screw SG 10395 (M4x6) needed.




Square Smart Fix SG 11210 - SG 11215 and bracket SG 2616:
Screw SG 10395 (M4x6) needed.

Smart Fix	X mm
SG 11200 / SG 11210	70-76
SG 11201 / SG 11211	90-96
SG 11202 / SG 11212	110-116
SG 11203 / SG 11213	130-136
SG 11204 / SG 11214	160-166
SG 11205 / SG 11215	210-216
SG 11154	126-154
SG 11155	156-184
SG 11156	206-234

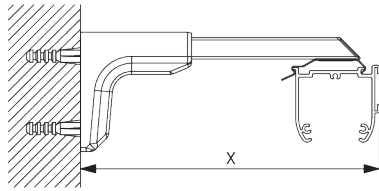

**Universal Smart Fix SG 11154 - SG 11156 and
bracket SG 2616:**

Screw SG 10492 (M4x8) needed.



SG 2616

Bracket




SG 10395

Pan head screw M4x6




SG 10492

Pan head screw M4x8




SG 11200

Smart Fix 60 mm




SG 11201

Smart Fix 80 mm




SG 11202

Smart Fix 100 mm




SG 11203

Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm




SG 11215

Square Smart Fix 200 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155



Universal Smart Fix 150 mm



SG 11156




Universal Smart Fix 200 mm

Bracket SG 2343




SG 2343
Bracket 46 mm


D. FITTING WITH
SIDE GUIDE
OPTION




SG 2338
Side guide wire holder




SG 8235
Side guide wire base short




SG 8236
Side guide wire base long



SG 8237
Side guide wire holder




SG 8249
Side guide device



SG 10120
Side guide wire ø 0.9 mm

SYSTEM OPTIONS

A. FABRIC MAKE-UP

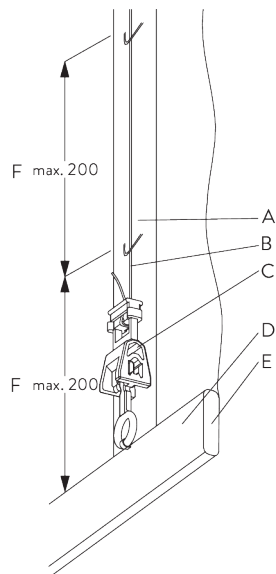

Type A (Standard)

Loop tape SG 3074:

A: Loop tape SG 3074 / SG 2164


B: Cord SG 2216

C: Child safety hook set SG 3164

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm

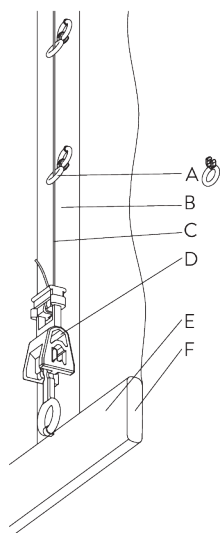

Type B

Ring tape SG 2164:

A: Child safety eyelet soft fold SG 3078


B: Ring tape SG 2164

C: Cord SG 2216

D: Child safety hook set SG 3164


E: Hollow hem

F: Bottom bar SG 2004

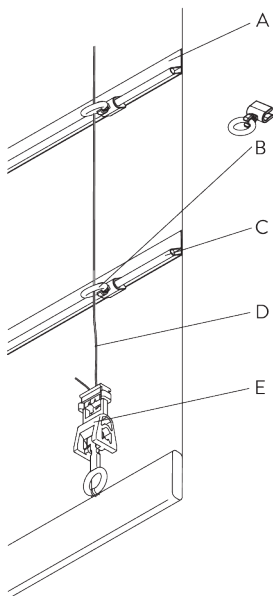

Type C


- A: Tape SG 2136
- B: Child safety eyelet hard fold SG 3069
- C: Rod SG 2135
- D: Cord SG 2216
- E: Child safety hook set SG 3164

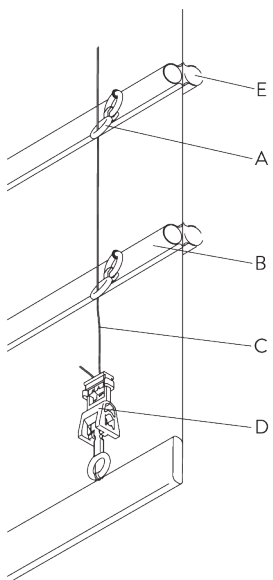

Type D

- A: Child safety eyelet set SG 3161 / SG 3165
- B: Tube SG 2144
- C: Cord SG 2216
- D: Child safety hook set SG 3164
- E: Option: tube SG 2144 / SG 2137 can be installed to room side

B. SIDE GUIDES

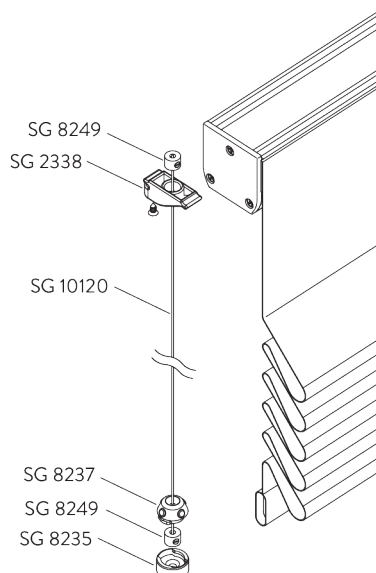

Additional parts:

- 2x SG 2338 Side guide wire holder
- 2x SG 8235 Side guide wire base short
- 2x SG 8237 Side guide wire holder
- 4x SG 8249 Side guide device
- 2x SG 10120 Side guide wire $\varnothing$ 0.9 mm

Note:

- Up to 15° from vertical

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, cross rods, etc.).
- Stack size is typically 15-20% of system height.

Fitting








- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!




Child Safety

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.











PARTS





















A. STANDARD PARTS

	SG 2004 Bottom bar 20x7 mm
	SG 2046 Chain wheel
	SG 2047 Driving sleeve
	SG 2216 Cord ø 0.85 mm
	SG 2221 Velcro tape
	SG 2321 Profile
	SG 2322 Pin
	SG 2323 Shell
	SG 2325 Cover
	SG 2326 Drive Case 4:1
	SG 2327 Tube adapter
	SG 2329 Tube adapter
	SG 2336 Support
	SG 2337 End cover



	SG 2539 Tape
	SG 2616 Bracket
	SG 3164 Child safety hook set
	SG 4845 Bead chain metal ø 4.5 mm
	SG 8214 Profile ø 18 mm
	SG 10139 Countersunk screw 2.9x6.5
	SG 10731 Child safety retainer set

B. OPTIONAL PARTS

	SG 2006 Bottom bar 28x3 mm
	SG 2091 End cover
	SG 2093 Ring
	SG 2135 Rod steel ø 3 mm
	SG 2136 Rod tape
	SG 2137 Rod fiberglass ø 4 mm
	SG 2144 Profile ø 8 mm
	SG 2164 Ring tape
	SG 2338 Side guide wire holder
	SG 2343 Bracket 46 mm
	SG 2616 Bracket
	SG 2865 Bead chain connector ø 4.6 mm
	SG 2872 Bead chain plastic ø 4.6 mm
	SG 3055 Hook

	SG 3069 Child safety eyelet		SG 11155 Universal Smart Fix 150 mm		SG 11482 Ring
	SG 3074 Loop tape		SG 11156 Universal Smart Fix 200 mm		
	SG 3161 Child safety eyelet set		SG 11200 Smart Fix 60 mm		
	SG 3165 Child safety eyelet set		SG 11201 Smart Fix 80 mm		
	SG 3166 Child safety tape set		SG 11202 Smart Fix 100 mm		
	SG 3340 Cord/chain weight		SG 11203 Smart Fix 120 mm		
	SG 8235 Side guide wire base short		SG 11204 Smart Fix 150 mm		
	SG 8236 Side guide wire base long		SG 11205 Smart Fix 200 mm		
	SG 8237 Side guide wire holder		SG 11210 Square Smart Fix 60 mm		
	SG 8249 Side guide device		SG 11211 Square Smart Fix 80 mm		
	SG 10120 Side guide wire ø 0.9 mm		SG 11212 Square Smart Fix 100 mm		
	SG 10395 Pan head screw M4x6		SG 11213 Square Smart Fix 120 mm		
	SG 10492 Pan head screw M4x8		SG 11214 Square Smart Fix 150 mm		
	SG 11154 Universal Smart Fix 120 mm		SG 11215 Square Smart Fix 200 mm		

SG 2345

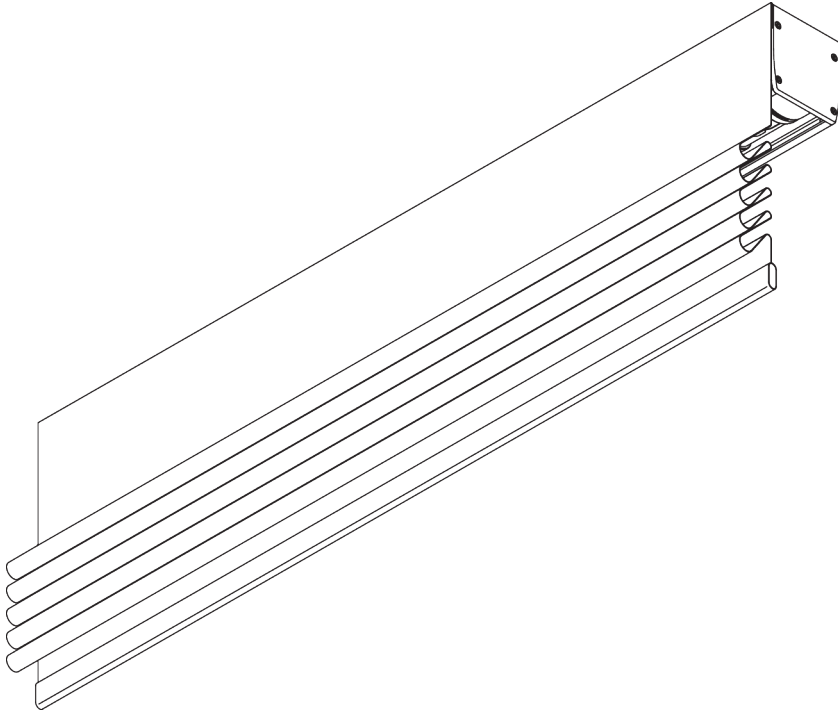

PRODUCT INFORMATION

- **Operation:** motorised (battery operated)
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016
- **Fabrics:** refer to Silent Gliss fabric collection

Features:


- Various control options
- Easy exchange of batteries
- Enclosed headrail

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



6 m



60 cm




6 m




2.5 kg

B. PROFILE


Profile information




SG 2351
Profile



SG 2352
Profile ø 50 mm




SG 2004
Bottom bar 20x7 mm



SG 2006
Bottom bar 28x3 mm




SG 2135
Rod steel ø 3 mm



SG 2137
Rod fiberglass ø 4 mm

C. HOW TO MEASURE

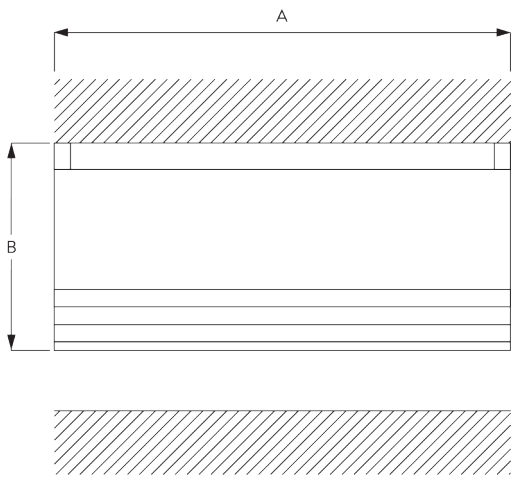


A: System width
B: System height

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the *Silent Gliss* website.

Fixing points





B. CEILING FITTING

Clamp SG 3003

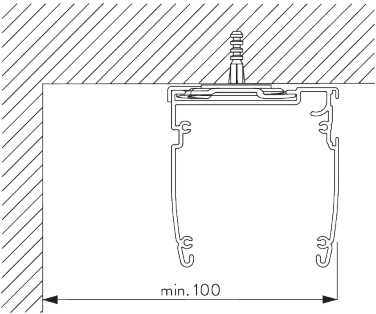

SG 3003
Clamp



Bracket SG 2521

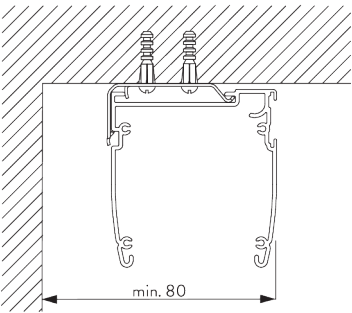

SG 2521
Bracket

C. WALL FITTING


Bracket SG 2363




SG 2363

Bracket 68 mm


Smart Fix




Smart Fix SG 11200 - SG 11204 and bracket SG 2521:
Screw SG 10395 (M4x6) needed.



Square Smart Fix SG 11210 - SG 11214 and
bracket SG 2521:
Screw SG 10395 (M4x6) needed.

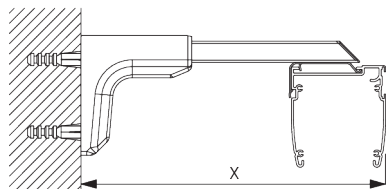

Universal Smart Fix SG 11154 - SG 11156 and
bracket SG 2521:
Screw SG 10492 (M4x8) needed.




SG 2521
Bracket



SG 10395
Pan head screw M4x6




SG 10492
Pan head screw M4x8




SG 11200
Smart Fix 60 mm


Smart Fix	X mm
SG 11200 / SG 11210	80-84
SG 11201 / SG 11211	100-104
SG 11202 / SG 11212	120-124
SG 11203 / SG 11213	140-144
SG 11204 / SG 11214	170-174
SG 11154	134-162
SG 11155	164-192
SG 11156	214-242




SG 11201
Smart Fix 80 mm




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm




SG 11210
Square Smart Fix 60 mm




SG 11211
Square Smart Fix 80 mm




SG 11212
Square Smart Fix 100 mm




SG 11213
Square Smart Fix 120 mm




SG 11214
Square Smart Fix 150 mm



SG 11154
Universal Smart Fix 120 mm




SG 11155
Universal Smart Fix 150 mm



SG 11156
Universal Smart Fix 200 mm

SYSTEM OPTIONS

A. FABRIC MAKE-UP

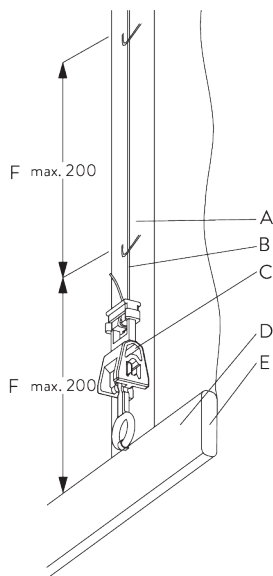

Type A (Standard)

Loop tape SG 3074:

A: Loop tape SG 3074 / SG 2164


B: Cord SG 2216

C: Child safety hook set SG 3164

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm

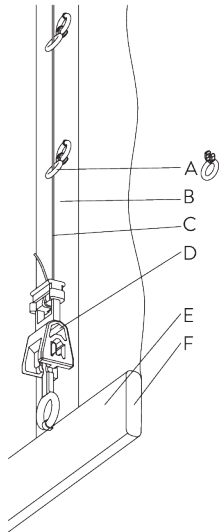

Type B

Ring tape SG 2164:

A: Child safety eyelet soft fold SG 3078


B: Ring tape SG 2164

C: Cord SG 2216

D: Child safety hook set SG 3164

E: Hollow hem

F: Bottom bar SG 2004

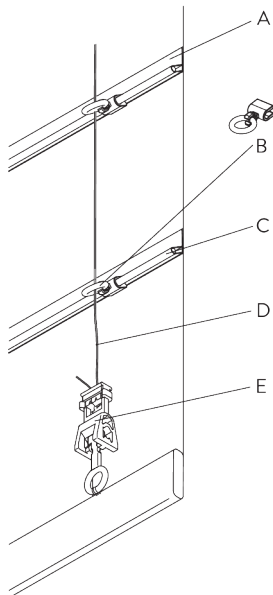

Type C


A: Tape SG 2136

B: Child safety eyelet hard fold SG 3069

C: Rod SG 2135

D: Cord SG 2216

E: Child safety hook set SG 3164

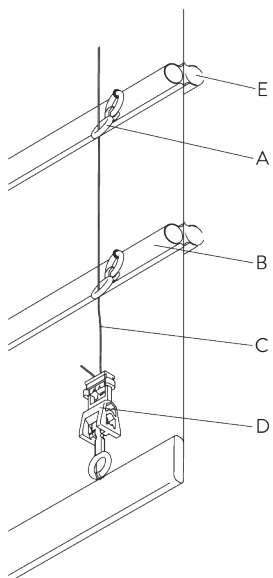

Type D

A: Child safety eyelet set SG 3161 / SG 3165


B: Tube SG 2144

C: Cord SG 2216

D: Child safety hook set SG 3164

E: Option: tube SG 2144 / SG 2137 can be installed to room side

B. BATTERY
EXCHANGE

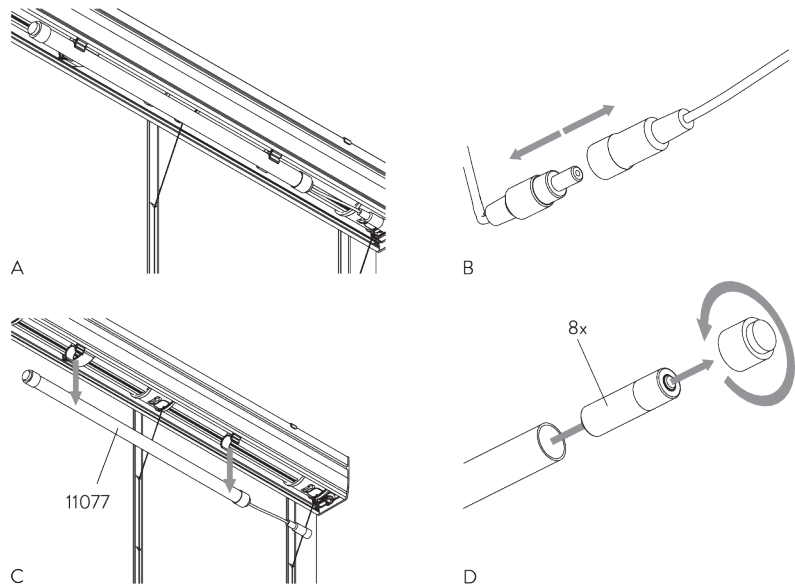

MOTOR & CONTROLS

A. MOTOR
FEATURES

Motor	SG 11076
Motor Features	
Soft start / stop	●
Built-in receiver	●
Electronic end-stop	●
Electronic revolution counter (unlimited revolution)	●
IP class	IP 44
Control Features	
SG Control A	●

B. MOTOR
SPECIFICATIONS

Motor	Min. system width	Voltage	Current	Speed	Frequency receiver
SG 11076	60 cm	12 V DC	0.55 A	30 rpm	433 MHz

C. OPERATION
METHODS

See catalogue "controls" for details.



GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, cross rods, etc.).
- Stack size is typically 15-20% of system height.

Fitting











- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!






Child Safety

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.










PARTS












A. STANDARD PARTS

	SG 2004 Bottom bar 20x7 mm
	SG 2216 Cord ø 0.85 mm
	SG 2221 Velcro tape
	SG 2351 Profile
	SG 2352 Profile ø 50 mm
	SG 2353 End cover
	SG 2354 End cover
	SG 2357 Pin
	SG 2358 Shell
	SG 2359 Support
	SG 2361 Tube adapter
	SG 2368 Motor plate
	SG 2539 Tape
	SG 3003 Clamp



	SG 3164 Child safety hook set
	SG 10139 Countersunk screw 2.9x6.5
	SG 10467 Countersunk head screw 2.9x13
	SG 10946 Radio hand held 1 channel
	SG 11071 Motor drive
	SG 11074 Tube adapter
	SG 11076 Motor 12V DC, 1.2/30
	SG 11077 Battery box
	SG 11085 Battery box holder
	SG 11099 AA Energizer Ultimate lithium batteries
	SG 11103 Warning sticker

B. OPTIONAL PARTS

	SG 2006 Bottom bar 28x3 mm
	SG 2093 Ring
	SG 2135 Rod steel ø 3 mm
	SG 2136 Rod tape
	SG 2137 Rod fiberglass ø 4 mm
	SG 2521 Bracket
	SG 3055 Hook
	SG 3074 Loop tape
	SG 3161 Child safety eyelet set
	SG 3165 Child safety eyelet set
	SG 3166 Child safety tape set
	SG 10395 Pan head screw M4x6
	SG 10492 Pan head screw M4x8
	SG 10947 Radio hand held 2+1 channel

	SG 10948 Radio hand held 6+1 channel		SG 11211 Square Smart Fix 80 mm
	SG 10949 Radio wall transmitter 1 channel		SG 11212 Square Smart Fix 100 mm
	SG 10950 Radio wall transmitter 2 channel		SG 11213 Square Smart Fix 120 mm
	SG 10951 Radio wall transmitter 5+1 channel		SG 11214 Square Smart Fix 150 mm
	SG 11093 Radio timer unit 16 channel		SG 11429 Radio timer unit 1 channel
	SG 11154 Universal Smart Fix 120 mm		SG 11482 Ring
	SG 11155 Universal Smart Fix 150 mm		
	SG 11156 Universal Smart Fix 200 mm		
	SG 11200 Smart Fix 60 mm		
	SG 11201 Smart Fix 80 mm		
	SG 11202 Smart Fix 100 mm		
	SG 11203 Smart Fix 120 mm		
	SG 11204 Smart Fix 150 mm		
	SG 11210 Square Smart Fix 60 mm		

SG 2350

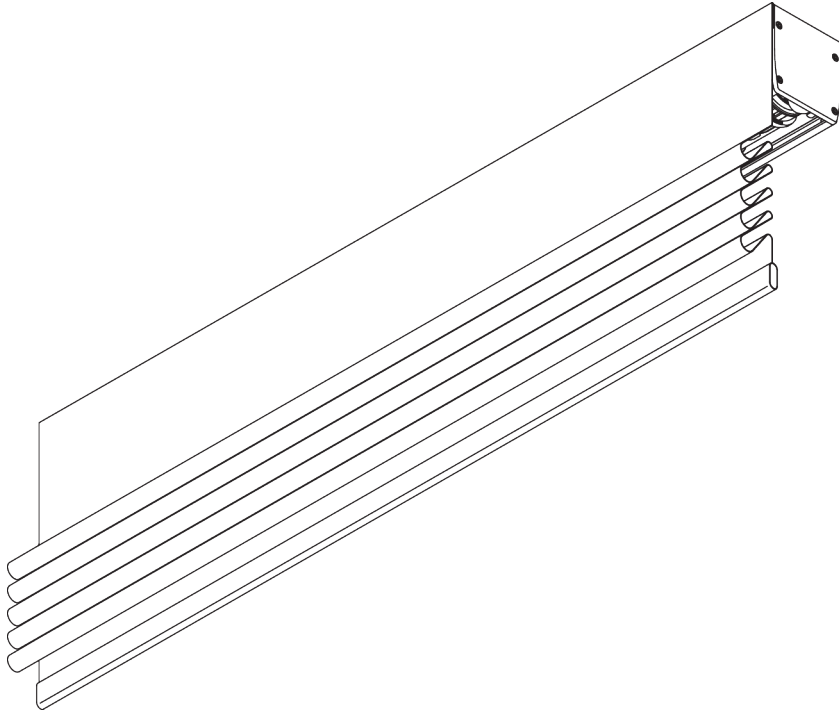

PRODUCT INFORMATION

- **Operation:** motorised
- **Range:** S - L
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- Quiet and fast motors
- Soft stop
- Various control options
- Enclosed headrail

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS




6 m



60 cm*

*see motor specification table



6 m




36 m²




15 kg

B. PROFILE


Profile information




SG 2351
Profile



SG 2352
Profile ø 50 mm




SG 2004
Bottom bar 20x7 mm




SG 2006
Bottom bar 28x3 mm



SG 2135
Rod steel ø 3 mm




SG 2137
Rod fiberglass ø 4 mm



SG 2144
Profile ø 8 mm

C. HOW TO MEASURE

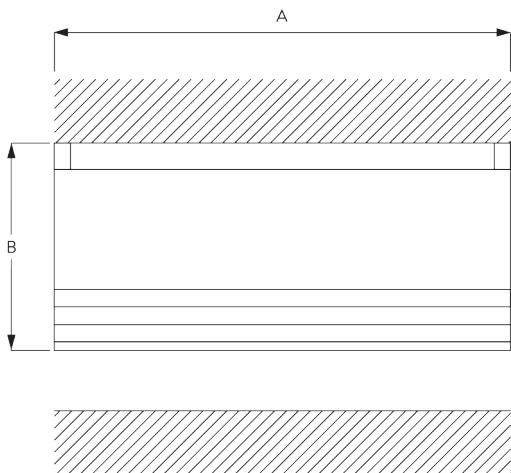


A: System width
B: System height

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the *Silent Gliss* website.

Fixing points





B. CEILING FITTING

Clamp SG 3003

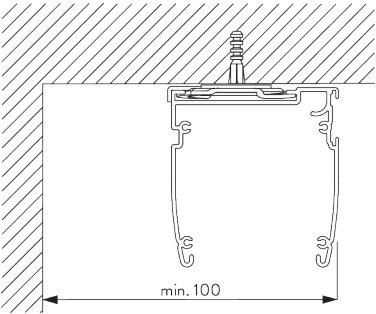

SG 3003
Clamp


Bracket SG 2521

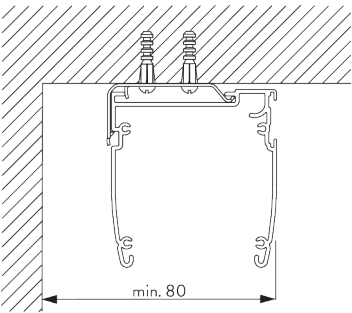


SG 2521
Bracket

C. WALL FITTING


Smart Fix



Smart Fix SG 11200 - SG 11204 and bracket SG 2521:
Screw SG 10395 (M4x6) needed.




Square Smart Fix SG 11210 - SG 11214 and bracket SG 2521:
Screw SG 10395 (M4x6) needed.

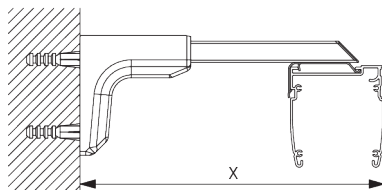

Universal Smart Fix SG 11154 - SG 11156 and bracket SG 2521:
Screw SG 10492 (M4x8) needed.

Smart Fix	X mm
SG 11200 / SG 11210	80-84
SG 11201 / SG 11211	100-104
SG 11202 / SG 11212	120-124
SG 11203 / SG 11213	140-144
SG 11204 / SG 11214	170-174
SG 11154	134-162
SG 11155	164-192
SG 11156	214-242




SG 2521
Bracket




SG 10395
Pan head screw M4x6




SG 10492
Pan head screw M4x8




SG 11200
Smart Fix 60 mm




SG 11201
Smart Fix 80 mm




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm




SG 11210
Square Smart Fix 60 mm




SG 11211
Square Smart Fix 80 mm




SG 11212
Square Smart Fix 100 mm




SG 11213
Square Smart Fix 120 mm




SG 11214
Square Smart Fix 150 mm



SG 11154
Universal Smart Fix 120 mm





SG 11155
Universal Smart Fix 150 mm






SG 11156
Universal Smart Fix 200 mm

Bracket SG 2363




SG 2363
Bracket 68 mm


D. FITTING WITH SIDE GUIDE OPTION




SG 2362
Side guide wire holder




SG 4948
Side guide wire ϕ 1.5 mm



SG 8235
Side guide wire base short




SG 8236
Side guide wire base long



SG 8237

Side guide wire holder




SG 8249

Side guide device

SYSTEM OPTIONS

A. FABRIC MAKE-UP

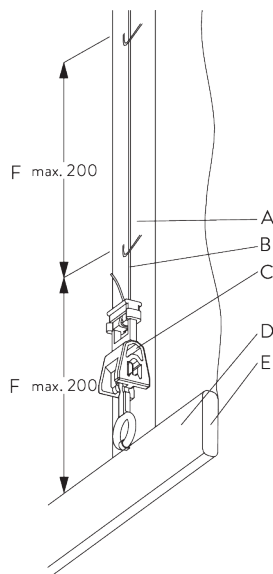

Type A (Standard)

Loop tape SG 3074:

A: Loop tape SG 3074 / SG 2164


B: Cord SG 2216

C: Child safety hook set SG 3164

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm

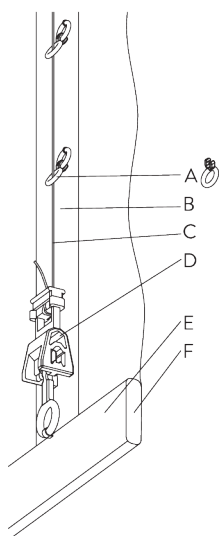

Type B

Ring tape SG 2164:

A: Child safety eyelet soft fold SG 3078


B: Ring tape SG 2164

C: Cord SG 2216

D: Child safety hook set SG 3164


E: Hollow hem

F: Bottom bar SG 2004

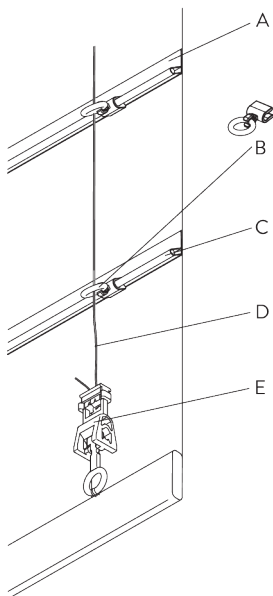

Type C


- A: Tape SG 2136
- B: Child safety eyelet hard fold SG 3069
- C: Rod SG 2135
- D: Cord SG 2216
- E: Child safety hook set SG 3164

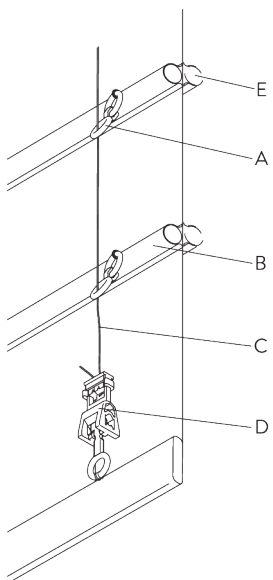

Type D

- A: Child safety eyelet set SG 3161 / SG 3165
- B: Tube SG 2144
- C: Cord SG 2216
- D: Child safety hook set SG 3164
- E: Option: tube SG 2144 / SG 2137 can be installed to room side

B. SIDE GUIDES

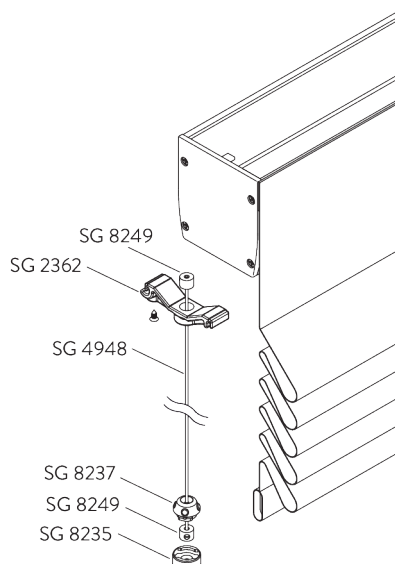

Additional parts:

- 2x SG 2362 Side guide wire holder
- 2x SG 4948 Side guide wire $\varnothing$ 1.5 mm
- 2x SG 8235 Side guide wire base short
- 2x SG 8237 Side guide wire holder
- 4x SG 8249 Side guide device

Note:

- Up to 15° from vertical

MOTORS & CONTROLS

A. MOTOR FEATURES

Motors	50-Series	40-Series	20-Series	20-Series	10-Series K	5-Series
	SG 11251 SG 11252	SG 11241 SG 11242 SG 11244 SG 11245	SG 10323 SG 10423 SG 10521 SG 10523	SG 10322 SG 10422 SG 10520 SG 10522	SG 10514 SG 10515	SG 10715 SG 10716
Motor Features						
Soft stop	•	•	•	•		
Electronic end-stop	•	•	•	•		
Electronic revolution counter (unlimited revolution)	•	•	•	•		
Mechanical end-stop					•	•
Mechanical revolution counter (limited revolution)					•	•
Two intermediate positions possible		•	•			
Bottom bar alignment	•	•				
Noiseless stop			•	•	•	
Parallel wiring possible without additional relays		•	•	•		
Disconnectable motor cable	•	•	•	•		
IP class	IP 30	IP 30	IP 44	IP 44	IP 44	IP 44
Control Features						
Mains power control			•	•	•	•
Dry contact control		•				
Dry contact and / or SG Control L control		•				
SG Control L (built-in receiver)		•	•			
SG Control R (external receiver required)				•		
Smart by Silent Gliss	•					
Suitable for most major home automation systems (with suitable interface)		•	•	•	•	•

B. MOTOR

SPECIFICATIONS

Motors	Max. weight	Min. system width	Voltage	Current	Frequency	Speed	Frequency receiver
50-Series (Smart by Silent Gliss)							
SG 11251	7.5 kg	60 cm	24 V DC	1.5 A	n/a	32 rpm	n/a
SG 11252	15 kg	60 cm	24 V DC	2.1 A	n/a	20 rpm	n/a
40-Series							
SG 11241	7.5 kg	82 cm	100-240 V AC	0.6 A	50-60 Hz	32 rpm	868 MHz
SG 11242	15 kg	82 cm	100-240 V AC	0.8 A	50-60 Hz	20 rpm	868 MHz
SG 11244	7.5 kg	60 cm	24 V DC	1.5 A	n/a	32 rpm	868 MHz
SG 11245	15 kg	60 cm	24 V DC	2 A	n/a	20 rpm	868 MHz
20-Series							
SG 10322 (standard)	15 kg	60 cm	230 V AC	0.73 A	50 Hz	30 rpm	n/a
SG 10323	15 kg	60 cm	230 V AC	0.73 A	50 Hz	30 rpm	868/915 MHz
SG 10422	7.5 kg	60 cm	120 V AC	1.1 A	50 Hz	36 rpm	n/a
SG 10423	7.5 kg	60 cm	120 V AC	1.1 A	50 Hz	36 rpm	915 MHz
SG 10520	15 kg	60 cm	120 V AC	1.1 A	50 Hz	19 rpm	n/a
SG 10521	15 kg	60 cm	120 V AC	1.1 A	50 Hz	19 rpm	915 MHz
SG 10522	7.5 kg	60 cm	230 V AC	0.55 A	50 Hz	30 rpm	n/a
SG 10523	7.5 kg	60 cm	230 V AC	0.55 A	50 Hz	30 rpm	868/915 MHz
10-Series K							
SG 10514	7.5 kg	60 cm	230 V AC	0.52 A	50 Hz	30 rpm	n/a
SG 10515	7.5 kg	60 cm	120 V AC	0.8 A	50 Hz	19 rpm	n/a
5-Series							
SG 10715	15 kg	60 cm	230 V AC	0.485 A	50-60 Hz	28 rpm	n/a
SG 10716	15 kg	60 cm	120 V AC	1.1 A	60 Hz	33 rpm	n/a

C. OPERATING

METHODS

See catalogue "controls" for details.

Wall Switch



System can be operated by fixed wall switch.

SG Control L



Various radio hand-held and wall transmitters available.



Silent Gliss Move App.

SG Control R



Various radio hand-held and wall transmitters available.
An external receiver is required.

Smart by Silent Gliss



Open designed two-way communication system which allows to flawlessly integrate products with most major home control systems.

D. WIRING DIAGRAMS



Refer to Silent Gliss website.

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, cross rods, etc.).
- Stack size is typically 15-20% of system height.

Fitting








- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!






Child Safety

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.










PARTS














A. STANDARD PARTS
























	SG 2004 Bottom bar 20x7 mm
	SG 2216 Cord ø 0.85 mm
	SG 2221 Velcro tape
	SG 2351 Profile
	SG 2352 Profile ø 50 mm
	SG 2353 End cover
	SG 2354 End cover
	SG 2355 Tube adapter
	SG 2357 Pin
	SG 2358 Shell
	SG 2359 Support
	SG 2361 Tube adapter
	SG 2366 Motor drive
	SG 2368 Motor plate

	SG 2539 Tape
	SG 3003 Clamp
	SG 3164 Child safety hook set
	SG 9917 Hirschmann portable socket-outlet STAK 3 N
	SG 10139 Countersunk screw 2.9x6.5
	SG 10284 O-Ring
	SG 10322 Tubular motor 230V AC, 20 Series S 5/30
	SG 11324 PT Screw Countersunk KA35x14


B. OPTIONAL PARTS

	SG 2006 Bottom bar 28x3 mm
	SG 2091 End cover
	SG 2093 Ring
	SG 2135 Rod steel ø 3 mm
	SG 2136 Rod tape
	SG 2137 Rod fiberglass ø 4 mm
	SG 2144 Profile ø 8 mm
	SG 2164 Ring tape
	SG 2362 Side guide wire holder
	SG 2363 Bracket 68 mm
	SG 2521 Bracket
	SG 3003 Clamp
	SG 3055 Hook
	SG 3069 Child safety eyelet

	SG 3074 Loop tape		SG 10293 Cable 230V AC, 2/3/5/10 m		SG 10523 Motor 230V AC, 20-Series S 3/30, radio receiver
	SG 3161 Child safety eyelet set		SG 10300 Radio hand held 1 channel		SG 10715 Tubular motor 230V AC, 5 Series S 6/28
	SG 3165 Child safety eyelet set		SG 10302 Radio hand held 5+1 channel		SG 10716 Tubular motor 120V AC, 5 Series S 6/33
	SG 3166 Child safety tape set		SG 10303 Radio hand held 10+2+1 channel		SG 10804 Radio hand held 15+5+1 channel
	SG 4948 Side guide wire ø 1.5 mm		SG 10323 Tubular motor 230V AC, 20-Series S 5/30, radio receiver		SG 10851 2 m cable UL certified incl. plug only for USA
	SG 5736 Relay socket		SG 10395 Pan head screw M4x6		SG 11154 Universal Smart Fix 120 mm
	SG 8235 Side guide wire base short		SG 10422 Tubular motor 120V AC, 20 Series S 3/36, UL		SG 11155 Universal Smart Fix 150 mm
	SG 8236 Side guide wire base long		SG 10423 Tubular motor 120V AC, 20 Series S 3/36, UL		SG 11156 Universal Smart Fix 200 mm
	SG 8237 Side guide wire holder		SG 10492 Pan head screw M4x8		SG 11200 Smart Fix 60 mm
	SG 8249 Side guide device		SG 10514 Tubular motor 230V AC, 10 Series S 3/30 K		SG 11201 Smart Fix 80 mm
	SG 9916 Hirschmann plug set		SG 10515 Tubular motor 120V AC, 10 Series S 3/19 K		SG 11202 Smart Fix 100 mm
	SG 9959 Central control unit relay		SG 10520 Tubular motor 120V AC, 20 Series S 5/20, UL		SG 11203 Smart Fix 120 mm
	SG 9960 Move server set		SG 10521 Tubular motor 120V AC, 20 Series S 5/20-915MHz, UL		SG 11204 Smart Fix 150 mm
	SG 9961 Move transmitter		SG 10522 Motor 230V AC, 20-Series S 3/30		SG 11210 Square Smart Fix 60 mm

	SG 11211 Square Smart Fix 80 mm		SG 11264 Power supply 24V DC, 3.8 Ampere DIN Rail		SG 20913 Wall switch single channel
	SG 11212 Square Smart Fix 100 mm		SG 11265 Power supply 24V DC, 5 Ampere DIN Rail		SG 20914 Wall switch 8 channel
	SG 11213 Square Smart Fix 120 mm		SG 11266 Power supply 24V DC, 10 Ampere DIN Rail		SG 20917 Pattress box
	SG 11214 Square Smart Fix 150 mm		SG 11281 Cabinet for 8 systems		SG 20918 Control module motor type A,AA
	SG 11241 Tubular motor 100-240V AC, 40- Series S 3/32, radio receiver		SG 11282 Cabinet for 24 systems		SG 20919 Control module motor type R
	SG 11242 Tubular motor 100-240V AC, 40- Series S 6/20, radio receiver		SG 11283 Cabinet for 56 systems		
	SG 11244 Tubular motor 24V DC, 40 Series S 3/32, radio receiver		SG 11319 Plug 4-pin, MC 1.5/4-ST-3.81		
	SG 11245 Tubular motor 24V DC, 40-Series S 6/20, radio receiver		SG 11351 Motor drive 5-Series		
	SG 11251 Tubular motor 24V DC, 50-Series S 3/32		SG 11352 Motor drive 40/50-Series		
	SG 11252 Tubular motor 24V DC, 50-Series S 6/20		SG 11480 Radio wall transmitter 1 channel		
	SG 11260 Smart controller gateway unit		SG 11482 Ring		
	SG 11261 Smart controller gateway unit KNX		SG 11490 Radio wall transmitter 5+1 channel		
	SG 11262 Smart controller expansion unit		SG 20336 Hand held transmitter 8 channel		
	SG 11263 Power supply 24V DC, 2 Ampere DIN Rail		SG 20907 Control module motor type R		

SG 2304

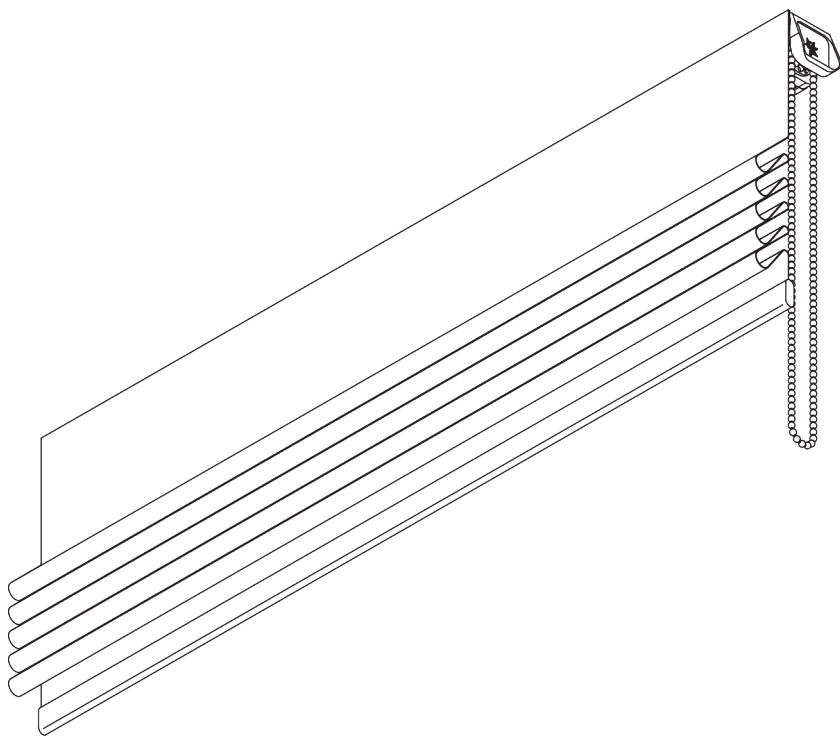

PRODUCT INFORMATION


- **Operation:** chain
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- 1-to-1 gear drive
- Stainless steel bead chain
- Enclosed headrail
- Integrated magnetic child safety end-set


SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS

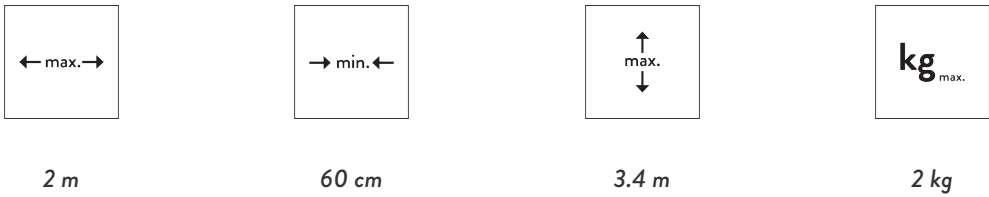


B. PROFILE

Profile information

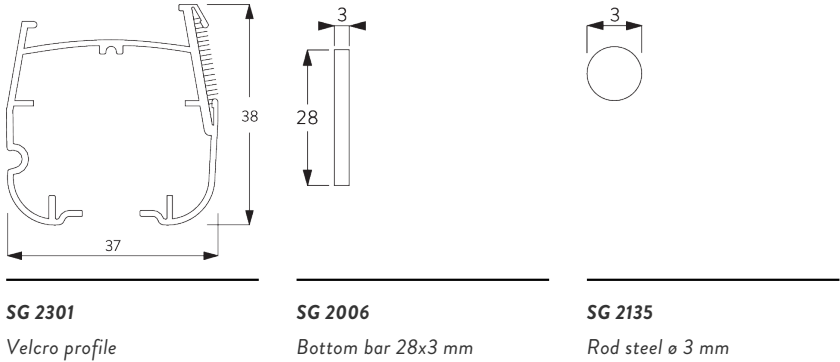


C. HOW TO MEASURE

Breakaway child safety chain drive SG 2307

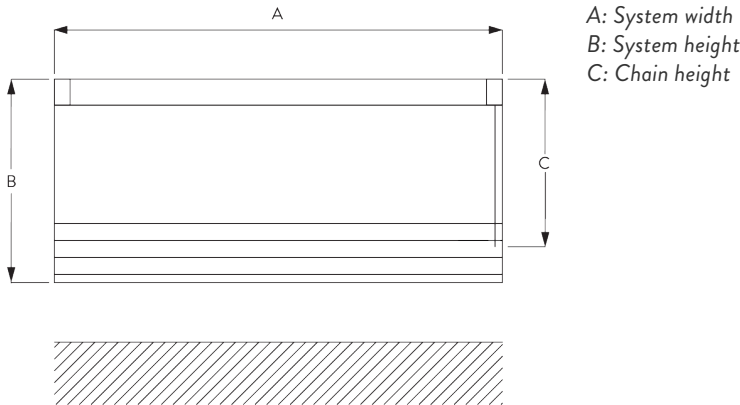

Non-breakaway chain drive SG 2317

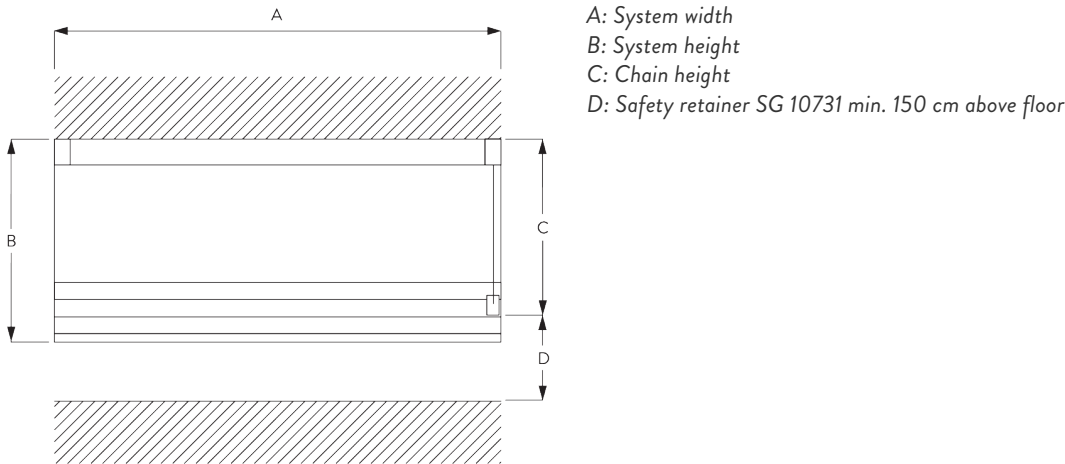


FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the *Silent Gliss* website.

Fixing points





B. CEILING FITTING

Bracket SG 2302



SG 2302
Bracket


Bracket SG 2346

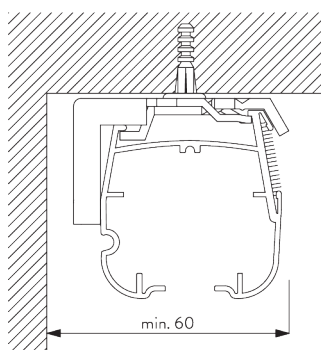


SG 2346
Bracket

C. WALL FITTING


Smart Fix



Smart Fix SG 11200 - SG 11205 and bracket SG 2302:
Screw SG 10395 (M4x6) needed.




Square Smart Fix SG 11210 - SG 11215 and
bracket SG 2302:
Screw SG 10395 (M4x6) needed.

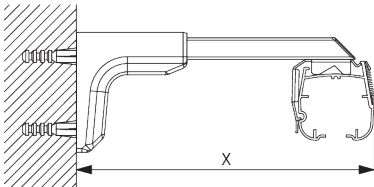

Universal Smart Fix SG 11154 - SG 11156 and
bracket SG 2302:
Screw SG 10492 (M4x8) needed.

Smart Fix	X mm
SG 11200 / SG 11210	71-79
SG 11201 / SG 11211	91-99
SG 11202 / SG 11212	111-119
SG 11203 / SG 11213	131-139
SG 11204 / SG 11214	161-164
SG 11205 / SG 11215	211-219
SG 11154	126-152
SG 11155	156-182
SG 11156	206-232




SG 2302
Bracket




SG 10395
Pan head screw M4x6




SG 10492
Pan head screw M4x8




SG 11200
Smart Fix 60 mm




SG 11201
Smart Fix 80 mm




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm




SG 11205
Smart Fix 200 mm




SG 11210
Square Smart Fix 60 mm



SG 11211
Square Smart Fix 80 mm




SG 11212
Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm




SG 11215

Square Smart Fix 200 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155

Universal Smart Fix 150 mm




SG 11156

Universal Smart Fix 200 mm

SYSTEM OPTIONS

A. FABRIC MAKE-UP

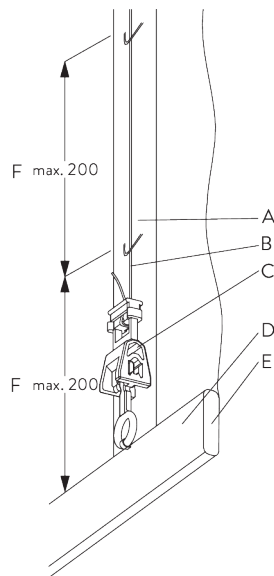

Type A (Standard)

Loop tape SG 3074:

A: Loop tape SG 3074 / SG 2164


B: Cord SG 2216

C: Child safety hook set SG 3164

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm

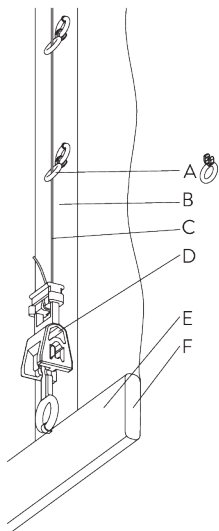

Type B

Ring tape SG 2164:

A: Child safety eyelet soft fold SG 3078


B: Ring tape SG 2164

C: Cord SG 2216

D: Child safety hook set SG 3164

E: Hollow hem

F: Bottom bar SG 2004

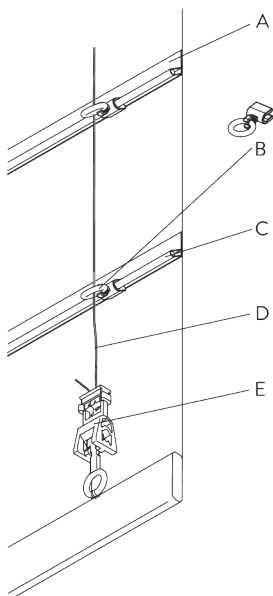

Type C


A: Tape SG 2136

B: Child safety eyelet hard fold SG 3069

C: Rod SG 2135

D: Cord SG 2216

E: Child safety hook set SG 3164

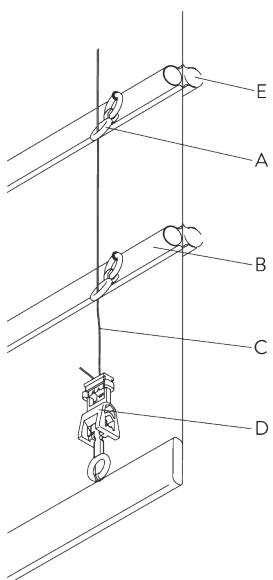

Type D

A: Child safety eyelet set SG 3165

B: Tube SG 2144

C: Cord SG 2216

D: Child safety hook set SG 3164

E: Option: tube SG 2144 / SG 2137 can be installed to room side

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, cross rods, etc.).
- Stack size is typically 15-20% of system height.

Fitting







- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.

Child Safety










- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.













PARTS


A. STANDARD PARTS

	SG 2004 Bottom bar 20x7 mm
	SG 2301 Velcro profile
	SG 2302 Bracket
	SG 2306 Child safety chain drive set 1:1
	SG 2308 Cord drum with lift cord
	SG 2309 Shaft
	SG 2311 Bead chain metal ø 4.5 mm
	SG 2539 Tape
	SG 3161 Child safety eyelet set
	SG 3164 Child safety hook set

B. OPTIONAL PARTS


	SG 2006 Bottom bar 28x3 mm
	SG 2091 End cover
	SG 2093 Ring
	SG 2135 Rod steel ø 3 mm
	SG 2136 Rod tape
	SG 2137 Rod fiberglass ø 4 mm
	SG 2144 Profile ø 8 mm
	SG 2164 Ring tape
	SG 2310 Bead chain plastic ø 4.5 mm
	SG 2312 Bead chain connector metal
	SG 2316 Chain drive set 1:1
	SG 2319 Bead chain connector plastic
	SG 2346 Bracket
	SG 2347 Bead chain loops plastic 100/150/200/250/300/350/400 cm

	SG 3055 Hook
	SG 3069 Child safety eyelet
	SG 3074 Loop tape
	SG 3165 Child safety eyelet set
	SG 3166 Child safety tape set
	SG 3340 Cord/chain weight
	SG 10395 Pan head screw M4x6
	SG 10492 Pan head screw M4x8
	SG 10731 Child safety retainer set
	SG 11154 Universal Smart Fix 120 mm
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11200 Smart Fix 60 mm
	SG 11201 Smart Fix 80 mm



SG 11202

Smart Fix 100 mm



SG 11203

Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm



SG 11214

Square Smart Fix 150 mm



SG 11215



Square Smart Fix 200 mm



SG 11482

Ring

SG 2305

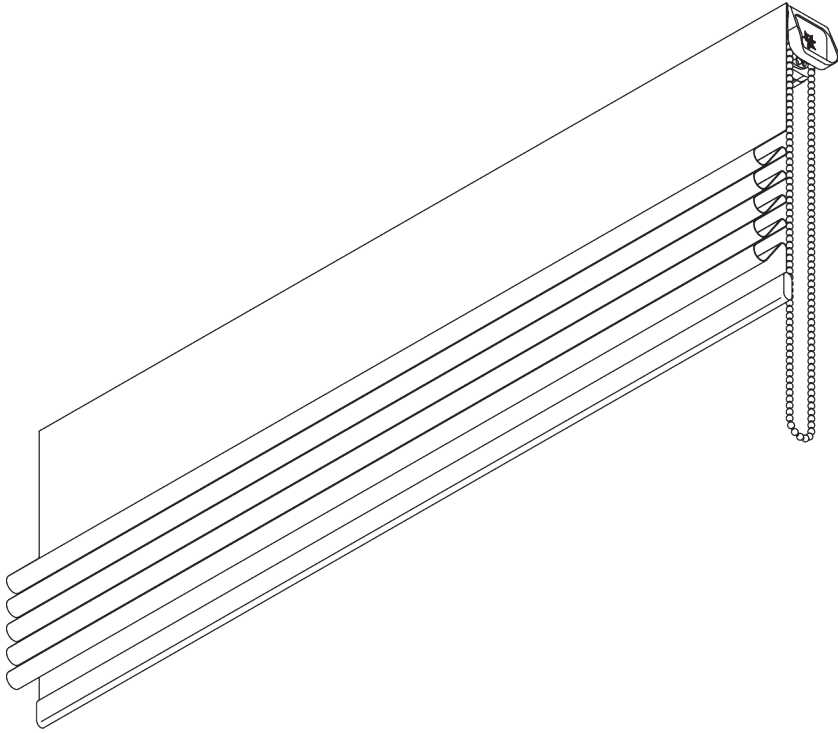

PRODUCT INFORMATION

- **Operation:** chain
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016
- **Fabrics:** refer to Silent Gliss fabric collection

Features:


- 1-to-4 gear drive
- Stainless steel bead chain
- Enclosed headrail
- Integrated magnetic child safety end-set

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



3 m



60 cm




3.4 m



4 kg


B. PROFILE

Profile information




SG 2301

Velcro profile



SG 2004

Bottom bar 20x7 mm




SG 2006

Bottom bar 28x3 mm




SG 2135

Rod steel ø 3 mm



SG 2137

Rod fiberglass ø 4 mm




SG 2144

Profile ø 8 mm


C. HOW TO MEASURE

Breakaway child safety chain drive SG 2307

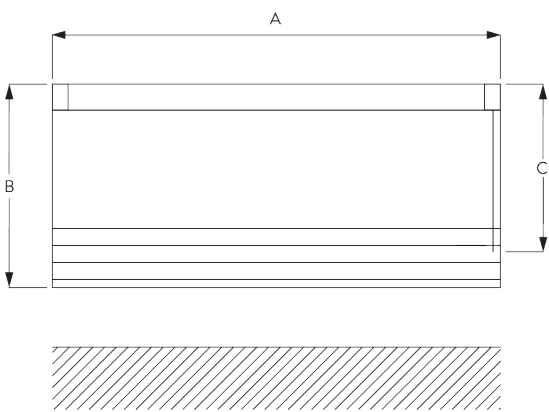

A: System width
B: System height
C: Chain height

Non-breakaway chain drive SG 2317

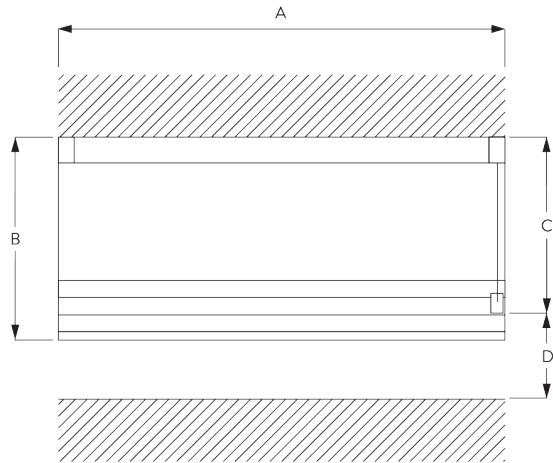


A: System width
B: System height
C: Chain height
D: Safety retainer SG 10731 min. 150 cm above floor

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the Silent Gliss website.

Fixing points




B. CEILING FITTING

Bracket SG 2302

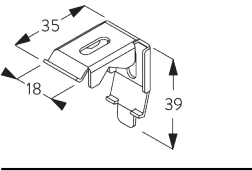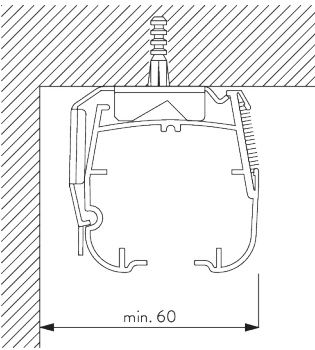

SG 2302
Bracket


Bracket SG 2346

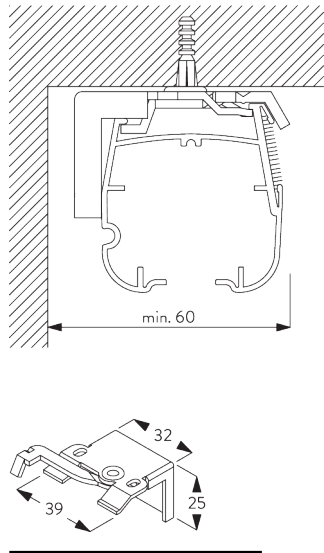


SG 2346
Bracket

C. WALL FITTING


Smart Fix



Smart Fix SG 11200 - SG 11205 and bracket SG 2302:
Screw SG 10395 (M4x6) needed.

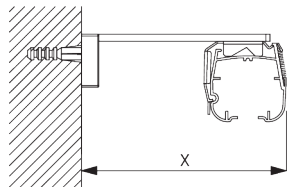


Square Smart Fix SG 11210 - SG 11215 and
bracket SG 2302:
Screw SG 10395 (M4x6) needed.

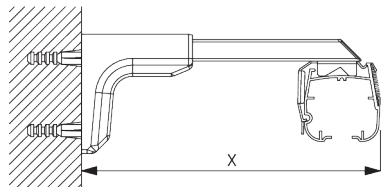

Universal Smart Fix SG 11154 - SG 11156 and
bracket SG 2302:
Screw SG 10492 (M4x8) needed.

Smart Fix	X mm
SG 11200 / SG 11210	71-79
SG 11201 / SG 11211	91-99
SG 11202 / SG 11212	111-119
SG 11203 / SG 11213	131-139
SG 11204 / SG 11214	161-164
SG 11205 / SG 11215	211-219
SG 11154	126-152
SG 11155	156-182
SG 11156	206-232




SG 2302
Bracket




SG 10395
Pan head screw M4x6




SG 10492
Pan head screw M4x8




SG 11200
Smart Fix 60 mm




SG 11201
Smart Fix 80 mm




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm




SG 11205
Smart Fix 200 mm




SG 11210
Square Smart Fix 60 mm




SG 11211
Square Smart Fix 80 mm




SG 11212
Square Smart Fix 100 mm




SG 11213
Square Smart Fix 120 mm




SG 11214
Square Smart Fix 150 mm




SG 11215
Square Smart Fix 200 mm



SG 11154
Universal Smart Fix 120 mm




SG 11155
Universal Smart Fix 150 mm



SG 11156
Universal Smart Fix 200 mm

SYSTEM OPTIONS

A. FABRIC MAKE-UP

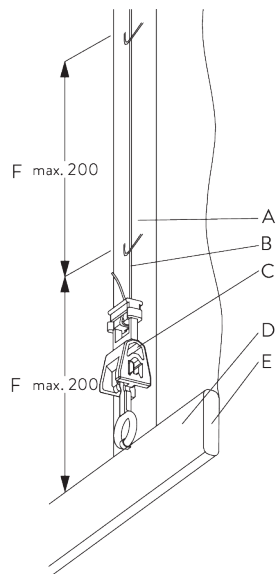

Type A (Standard)

Loop tape SG 3074:

A: Loop tape SG 3074 / SG 2164


B: Cord SG 2216

C: Child safety hook set SG 3164

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm

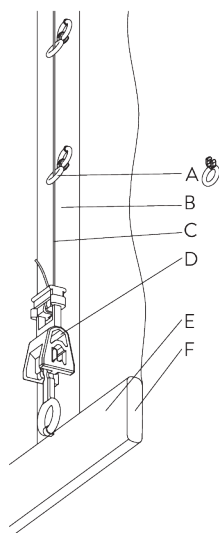

Type B

Ring tape SG 2164:

A: Child safety eyelet soft fold SG 3078


B: Ring tape SG 2164

C: Cord SG 2216

D: Child safety hook set SG 3164


E: Hollow hem

F: Bottom bar SG 2004

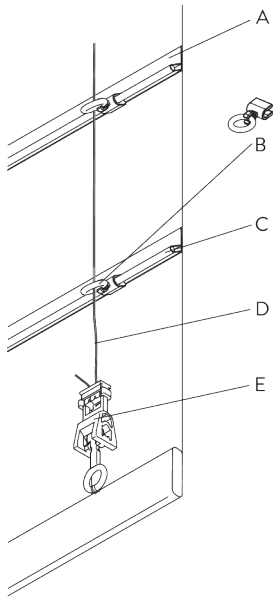

Type C

- A: Tape SG 2136
- B: Child safety eyelet hard fold SG 3069
- C: Rod SG 2135
- D: Cord SG 2216
- E: Child safety hook set SG 3164

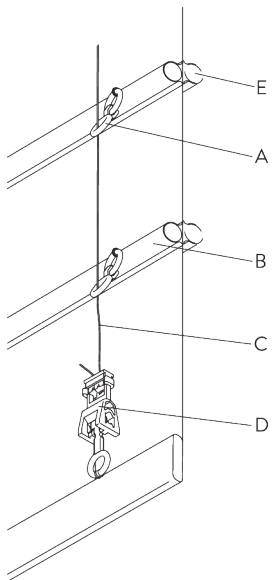

Type D

- A: Child safety eyelet set SG 3165
- B: Tube SG 2144
- C: Cord SG 2216
- D: Child safety hook set SG 3164
- E: Option: tube SG 2144 / SG 2137 can be installed to room side

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, cross rods, etc.).
- Stack size is typically 15-20% of system height.

Fitting







- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.

Child Safety










- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.












PARTS


A. STANDARD PARTS

	SG 2004 Bottom bar 20x7 mm
	SG 2301 Velcro profile
	SG 2302 Bracket
	SG 2307 Child safety chain drive set 4:1
	SG 2308 Cord drum with lift cord
	SG 2309 Shaft
	SG 2311 Bead chain metal ø 4.5 mm
	SG 2539 Tape
	SG 3161 Child safety eyelet set
	SG 3164 Child safety hook set

B. OPTIONAL PARTS


	SG 2006 Bottom bar 28x3 mm
	SG 2091 End cover
	SG 2093 Ring
	SG 2135 Rod steel ø 3 mm
	SG 2136 Rod tape
	SG 2137 Rod fiberglass ø 4 mm
	SG 2144 Profile ø 8 mm
	SG 2164 Ring tape
	SG 2310 Bead chain plastic ø 4.5 mm
	SG 2312 Bead chain connector metal
	SG 2317 Chain drive set 4:1
	SG 2319 Bead chain connector plastic
	SG 2346 Bracket
	SG 2347 Bead chain loops plastic 100/150/200/250/300/350/400 cm

	SG 3055 Hook
	SG 3069 Child safety eyelet
	SG 3074 Loop tape
	SG 3165 Child safety eyelet set
	SG 3166 Child safety tape set
	SG 3340 Cord/chain weight
	SG 10395 Pan head screw M4x6
	SG 10492 Pan head screw M4x8
	SG 10731 Child safety retainer set
	SG 11154 Universal Smart Fix 120 mm
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11200 Smart Fix 60 mm
	SG 11201 Smart Fix 80 mm




SG 11202

Smart Fix 100 mm




SG 11203

Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm



SG 11214

Square Smart Fix 150 mm



SG 11215

Square Smart Fix 200 mm



SG 11482

Ring

The Architects of Silence

Silent Gliss is the leading global supplier of premium interior window treatments. Since 1952 we have been tirelessly committed to the development of the worlds` smoothest, quietest systems using state of the art technology.

Driven by customer needs, Silent Gliss offers functional and durable products. Expert technical advice coupled with installation and support services complete the offer. Silent Gliss stands for innovative, sustainable, tailor made solutions, exceptional design and first-class quality.

Silent Gliss International Ltd.

Ostermundigenstrasse 99a
3006 Bern
Switzerland

T +41 31 958 85 85

F +41 31 958 85 86

info@silentgliss.com

silentgliss.com