


SG 1012

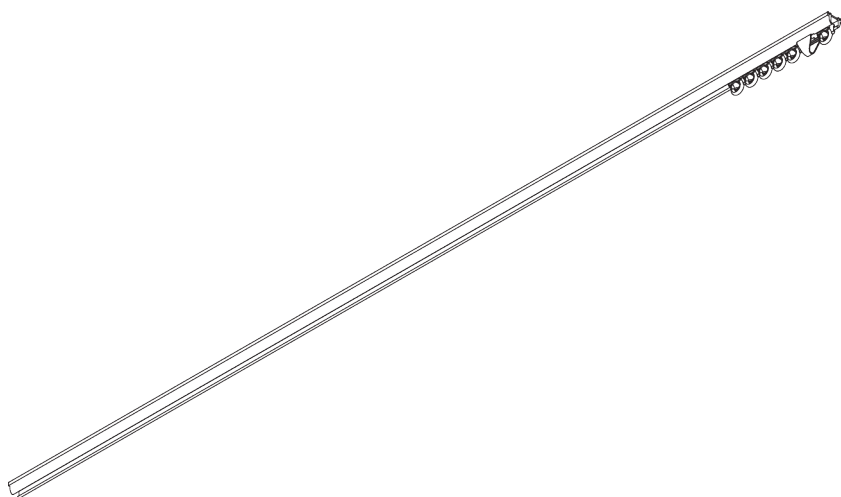

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** ceiling (center SG 7550)
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Pre-drilled profile
- Bendable
- Fitting tool center SG 7550

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 1012p

Profile

Radius:
✓ 6 cm, 10 cm

B. HOW TO MEASURE

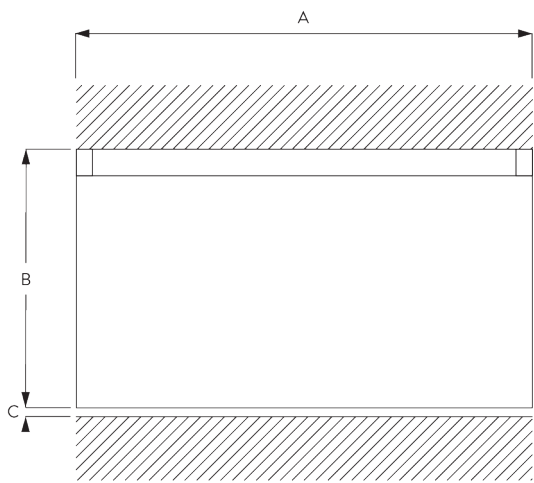


A: System width
B: System height
C: Distance between floor and fabric

FITTING


A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.


Fixing points



Fitting Tool

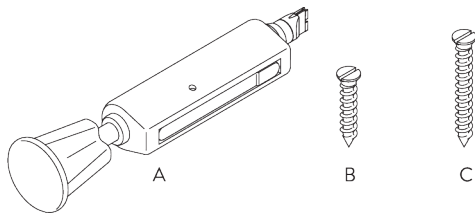


A: Center SG 7550 Tool
B: Special Screw SG 3019 / 12 mm
C: Special Screw SG 3025 / 18 mm

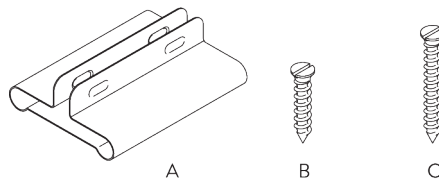



A: Profile Protector SG 7002
 B: Special Screw SG 3019 / 12 mm
 C: Special Screw SG 3025 / 18 mm

B. CEILING FITTING

Direct into wood

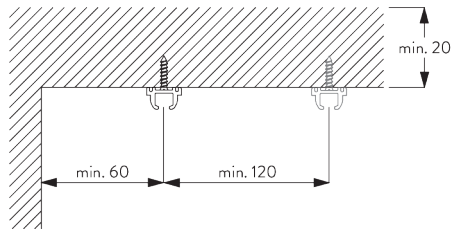


Bracket SG 3112

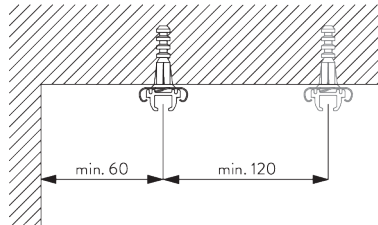

SG 3112
 Bracket

Bracket SG 3121

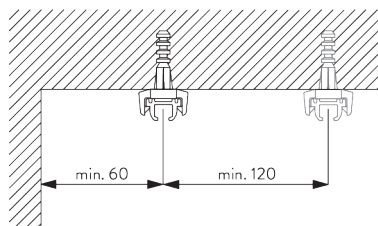

SG 3121
 Bracket

GENERAL NOTES

Dimensions

- *Measurements are in mm except where indicated.*
- *Max. kg relates to fabric incl. accessories.*
- *Stack size depends on curtain make-up and fabric thickness.*
- *Distance between gliders max. 80 mm / distance between rollers max. 100 mm.*
- *Recommended distance floor / fabric: 20 mm.*
- *In order to determine system height (B), the smallest room height must be taken into account.*

Fitting


- *Installation by qualified fitter only.*
- *Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.*
- *Qualified fitter must use appropriate screws / fixings for each situation.*
- *Profile lip if applicable to be installed to room side.*

Child Safety





- *All relevant Silent Gliss systems correspond to child safety EN 13120.*
- *All parties involved must comply with EN 13120.*



PARTS

A. STANDARD PARTS

	SG 1012p Profile
	SG 3019 Special screw 12 mm
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider

B. OPTIONAL PARTS

	SG 3016 End stop
	SG 3020 Hook
	SG 3025 Special screw 18 mm
	SG 3032 Spring stop
	SG 3064 Connecting bridge
	SG 3071 End stop
	SG 3112 Bracket
	SG 3511 Glider
	SG 3512 End cover
	SG 3534 Glider 3533 on strip
	SG 3535 Glider
	SG 3537 Glider
	SG 3548 Glider
	SG 3549 Click glider with hook

	SG 3570 Glider
	SG 3571 Hook
	SG 3582 Hook
	SG 3598 Hook
	SG 3599 Hook
	SG 7002 Profile protector
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11335 End stop

